

Precision 7770

Setup and Specifications

Notes, cautions, and warnings

 **NOTE:** A NOTE indicates important information that helps you make better use of your product.

 **CAUTION:** A CAUTION indicates either potential damage to hardware or loss of data and tells you how to avoid the problem.

 **WARNING:** A WARNING indicates a potential for property damage, personal injury, or death.

Chapter 1: Set up your Precision 7770.....	5
Chapter 2: Views of Precision 7770.....	7
Right.....	7
Left.....	8
Top.....	9
Front.....	10
Bottom.....	11
Service Tag.....	11
Battery charge and status light	12
Chapter 3: Specifications of Precision 7770.....	13
Dimensions and weight.....	13
Processor.....	13
Chipset.....	14
Operating system.....	14
Memory.....	14
External ports.....	15
Internal slots.....	15
Ethernet.....	16
Wireless module.....	16
WWAN module.....	16
Audio.....	17
Storage.....	17
RAID (Redundant Array of Independent Disks).....	18
Media-card reader.....	18
Keyboard.....	19
Camera.....	19
Touchpad.....	20
Power adapter.....	20
Battery.....	21
Display.....	22
Fingerprint reader.....	23
Sensor	23
GPU—Integrated.....	23
Multiple display support matrix.....	24
GPU — Discrete.....	24
Multiple display support matrix.....	24
Hardware security.....	25
Smart-card reader.....	25
Contactless smart-card reader.....	25
Contacted smart-card reader.....	27
Operating and storage environment.....	28

Chapter 4: Keyboard shortcuts of Precision 7770.....	29
Chapter 5: Getting help and contacting Dell.....	31

Set up your Precision 7770

About this task

NOTE: The images in this document may differ from your computer depending on the configuration you ordered.

Steps

1. Connect the power adapter and press the power button.



NOTE: To conserve battery power, the battery might enter power saving mode. Connect the power adapter and press the power button to turn on the computer.

2. Finish operating system setup.

For Ubuntu:

Follow the on-screen instructions to complete the setup. For more information about installing and configuring Ubuntu, search in the Knowledge Base Resource at www.dell.com/support.

For Windows:

Follow the on-screen instructions to complete the setup. When setting up, Dell recommends that you:

- Connect to a network for Windows updates.

NOTE: If connecting to a secured wireless network, enter the password for the wireless network access when prompted.

- If connected to the internet, sign-in with or create a Microsoft account. If not connected to the internet, create an offline account.

- On the **Support and Protection** screen, enter your contact details.


3. Locate and use Dell apps from the Windows Start menu—Recommended.

Table 1. Locate Dell apps

Resources	Description
	<p>Dell Product Registration Register your computer with Dell.</p>
	<p>Dell Help & Support Access help and support for your computer.</p>
	<p>SupportAssist SupportAssist is the smart technology that keeps your computer running at its best by optimizing settings, detecting issues, removing viruses and notifies when you need to make system updates. SupportAssist proactively checks the health of your system's hardware and software. When an issue is detected, the necessary system state information is sent to Dell to begin troubleshooting. SupportAssist is preinstalled on most of the Dell devices running Windows operating system. For more information, see SupportAssist for Home PCs User's Guide on www.dell.com/serviceabilitytools.</p> <p>NOTE: In SupportAssist, click the warranty expiry date to renew or upgrade your warranty.</p>
	<p>Dell Update Updates your computer with critical fixes and latest device drivers as they become available. For more information on using Dell Update, search in the Knowledge Base Resource at www.dell.com/support.</p>
	<p>Dell Digital Delivery Download software applications, which are purchased but not preinstalled on your computer. For more information on using Dell Digital Delivery, search in the Knowledge Base Resource at www.dell.com/support.</p>

Views of Precision 7770

Right

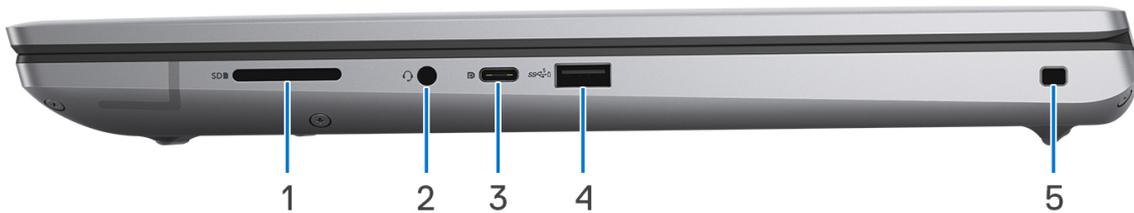

1. SD-card slot

Reads from and writes to the SD card. The computer supports the following card types:

- Secure Digital (SD)
- Secure Digital High Capacity (SDHC)
- Secure Digital Extended Capacity (SDXC)

2. Universal audio jack

Connect headphones or a headset (headphone and microphone combo).

3. USB 3.2 Gen 2 Type-C port with DisplayPort alt mode

Connect devices such as external storage devices, printers, and external displays. Provides data transfer rate of up to 10 Gbps.

Supports DisplayPort 1.4 and also enables you to connect an external display using a display adapter.

NOTE: A USB Type-C to DisplayPort adapter (sold separately) is required to connect a DisplayPort device.

4. USB 3.2 Gen 1 port with PowerShare

Connect devices such as external storage devices and printers.

Provides data transfer speeds up to 5 Gbps. PowerShare enables you to charge your USB devices even when your computer is turned off.

NOTE: If your computer is turned off or in hibernate state, you must connect the power adapter to charge your devices using the PowerShare port. You must enable this feature in the BIOS setup program.

NOTE: Certain USB devices may not charge when the computer is turned off or in sleep state. In such cases, turn on the computer to charge the device.

5. Security-cable slot (wedge-shaped)

Connect a security cable to prevent unauthorized movement of your computer.

Left



1. Power-adapter port - 7.4 mm

Connect a power adapter to provide power to your computer and charge the battery.

2. Network port

Connect an Ethernet (RJ45) cable from a router or a broadband modem for network or Internet access, with a transfer rate of 10/100/1000 Mbps.

3. HDMI 2.0a port (integrated graphics)/HDMI 2.1 port (discrete graphics)

Connect to a TV, external display or another HDMI-in enabled device. Provides video and audio output.

4. USB 3.2 Gen 1 port

Connect devices such as external storage devices and printers. Provides data transfer speeds up to 5 Gbps.

5. Thunderbolt 4 ports with USB Type-C

Supports USB4, DisplayPort 1.4, Thunderbolt 4 and also enables you to connect to an external display using a display adapter. Provides data transfer rates of up to 40 Gbps for USB4 and Thunderbolt 4.

NOTE: You can connect a Dell Docking Station to the Thunderbolt 4 ports. For more information, search in the Knowledge Base Resource at www.dell.com/support.

NOTE: A USB Type-C to DisplayPort adapter (sold separately) is required to connect a DisplayPort device.

NOTE: USB4 is backward compatible with USB 3.2, USB 2.0, and Thunderbolt 3.

NOTE: Thunderbolt 4 supports two 4K displays or one 8K display.

6. Smart card reader

Top



1. Power button with optional finger print reader

Press to turn on the computer if it is turned off, in sleep state, or in hibernate state.

Press to put the computer in sleep state if it is turned on.

Press and hold for four seconds to force shut-down the computer.


Press and hold for 25 seconds to force Real Time Clock (RTC) battery reset.

2. Keyboard

3. Precision touchpad

Move your finger on the touchpad to move the mouse pointer. Tap to left-click and two fingers tap to right-click.

Front

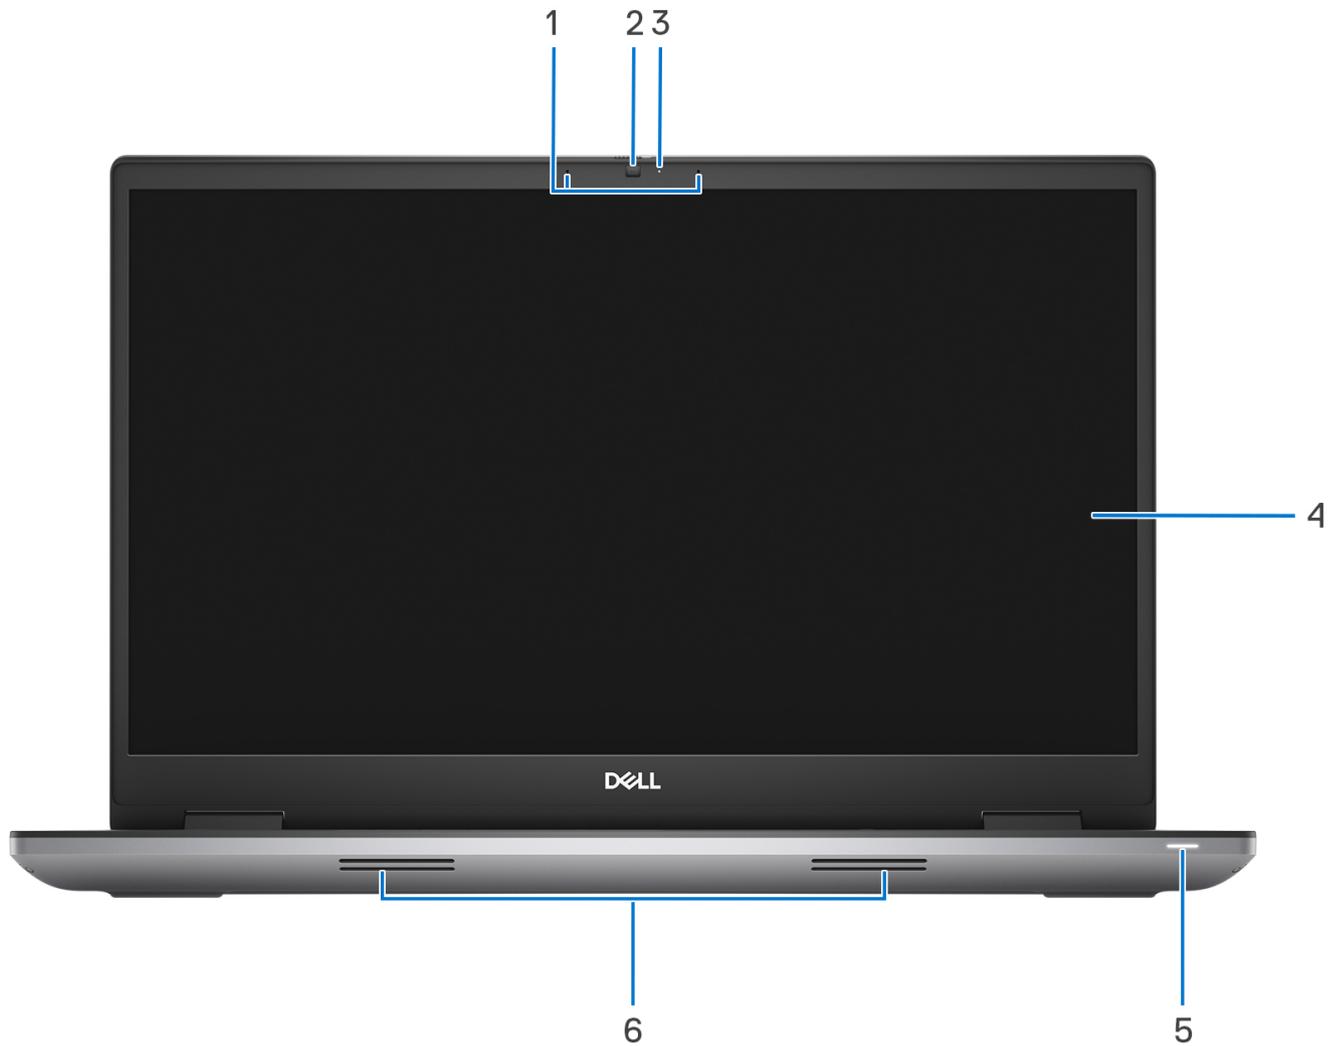

1. Microphones

Provides digital sound input for audio recording, voice calls, and so on.

2. RGB-infrared camera

This combined camera supports both infrared Windows Hello facial recognition and standard RGB imaging for photos and videos.

3. Camera-status light

Turns on when the camera is in use.

4. LCD panel

Provides visual output to the user.

5. Power-status light


Indicates the power state of the computer.

White light—Power adapter is connected and the battery is charging.

6. Speakers

Provide audio output.

Bottom

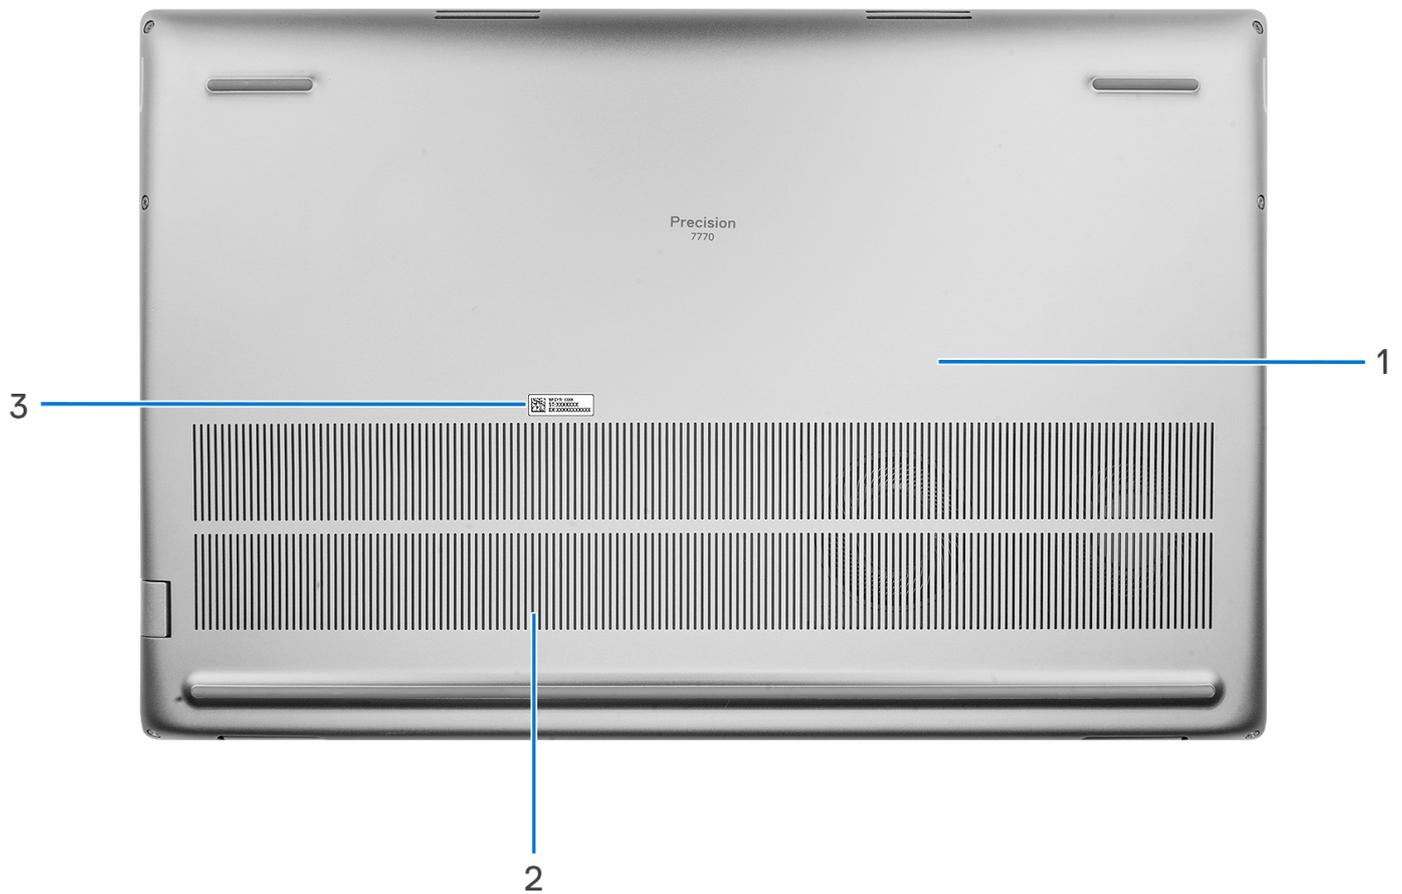

1. **Base cover**

2. **Air vents**

Air is blown out by the internal fans through the air vents.


NOTE: To prevent the computer from overheating, ensure that the air vents are not blocked when the computer is running.

3. **Service Tag and regulatory labels**

The Service Tag is a unique alphanumeric identifier that enables Dell service technicians to identify the hardware components in your computer and access warranty information. The regulatory label contains regulatory information of your computer.

Service Tag

The service tag is a unique alphanumeric identifier that allows Dell service technicians to identify the hardware components in your computer and access warranty information.

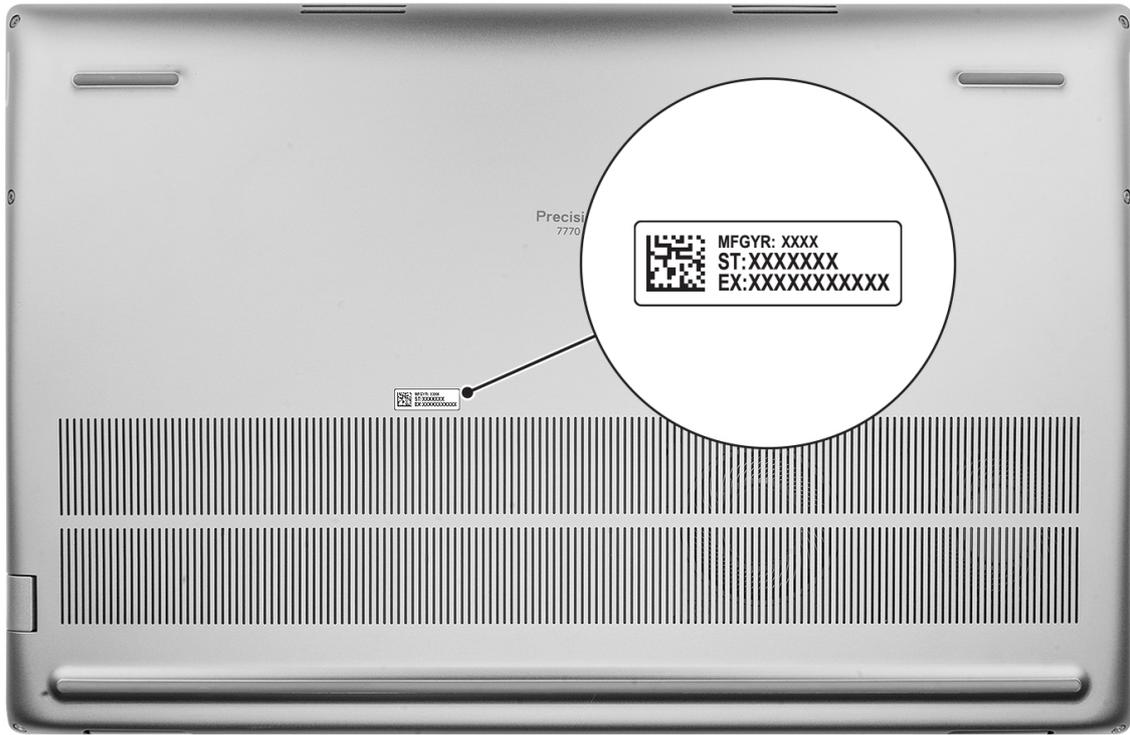

Battery charge and status light

The following table lists the battery charge and status light behavior of your Precision 7770.

Table 2. Battery charge and status light behavior

Power Source	LED Behavior	System Power State	Battery Charge Level
AC Adapter	Off	S0 - S5	Fully Charged
AC Adapter	Solid White	S0 - S5	< Fully Charged
Battery	Off	S0 - S5	11-100%
Battery	Solid Amber (590+/-3 nm)	S0 - S5	< 10%

- S0 (ON) - System is turned on.
- S4 (Hibernate) - The system consumes the least power compared to all other sleep states. The system is almost at an OFF state, expect for a trickle power. The context data is written to hard drive.
- S5 (OFF) - The system is in a shutdown state.

Specifications of Precision 7770

Dimensions and weight

The following table lists the height, width, depth, and weight of your Precision 7770.

Table 3. Dimensions and weight

Description	Values
Height:	
Front height	1.03 in. (25.95 mm)
Rear height	1.06 in. (26.70 mm)
Width	15.67 in. (398.00 mm)
Depth	10.44 in. (265.02 mm)
Weight	6.66 lb (3.02 kg)
 NOTE: The weight of your computer depends on the configuration ordered and manufacturing variability.	

Processor

The following table lists the details of the processors supported by your Precision 7770.

Table 4. Processor

Description	Option one	Option two	Option three	Option four	Option five
Processor type	12 th Generation Intel Core i5-12600HX, vPro	12 th Generation Intel Core i7-12800HX	12 th Generation Intel Core i7-12850HX, vPro	12 th Generation Intel Core i9-12900HX	12 th Generation Intel Core i9-12950HX, vPro
Processor wattage	55 W				
Processor core count	4 P cores and 8 E cores	8 P cores and 8 E cores			
Processor thread count	16	24	24	24	24
Processor speed	P cores 2.50 GHz to 4.60 GHz, E cores 1.80 GHz to 3.30 GHz	P cores 2.00 GHz to 4.80 GHz, E cores 1.50 GHz to 3.40 GHz	P cores 2.10 GHz to 4.80 GHz, E cores 1.50 GHz to 3.40 GHz	P cores 2.30 GHz to 5.00 GHz, E cores 1.70 GHz to 3.60 GHz	P cores 2.30 GHz to 5.00 GHz, E cores 1.70 GHz to 3.60 GHz
Processor cache	18 MB	25 MB	25 MB	30 MB	30 MB
Integrated graphics	Intel UHD Graphics	Intel UHD Graphics	Intel UHD Graphics	Intel UHD Graphics	Intel UHD Graphics

Chipset

The following table lists the details of the chipset supported by your Precision 7770.

Table 5. Chipset

Description	Values
Chipset	Intel PCH-LP
Processor	Intel 12 th Generation Intel Core i5/i7/i9
DRAM bus width	64-bit
Flash EPROM	64 MB
PCIe bus	Up to Gen4

Operating system

Your Precision 7770 supports the following operating systems:

- Windows 11 Pro, 64-bit with DGR
- Windows 11 Pro National Education, 64-bit
- Windows 11 Home, 64-bit with DGR
- Windows 10 Home, 64-bit (factory installed downgrade with a Windows 11 Professional License)
- Windows 10 Pro, 64-bit (factory installed downgrade with a Windows 11 Professional License)
- Windows 10 Enterprise, 64-bit (factory installed downgrade with a Windows 11 Professional License)
- Windows 10 Pro Education, 64-bit (factory installed downgrade with a Windows 11 Professional License)
- Windows 10 Pro China, 64-bit (factory installed downgrade with a Windows 11 Professional License)
- RedHat Enterprise Linux 8.6
- Ubuntu 20.04 LTS, 64-bit

Memory

The following table lists the memory specifications of your Precision 7770.

Table 6. Memory specifications

Description	Values
Memory slots	CAMM interface
Memory type	DDR5
Memory speed	<ul style="list-style-type: none">• 3600 MHz• 4800 MHz
Maximum memory configuration	<ul style="list-style-type: none">• 128 GB - CAMM module
Minimum memory configuration	<ul style="list-style-type: none">• 16 GB - CAMM module
Memory size per slot	8 GB, 16 GB, 32 GB, 64 GB, 128 GB
Memory configurations supported	<ul style="list-style-type: none">• 16 GB, 1 x 16 GB, DDR5, 4800 MHz, non-ECC, CAMM module

Table 6. Memory specifications (continued)

Description	Values
	<ul style="list-style-type: none"> 32 GB, 1 x 32 GB, DDR5, 4800 MHz, non-ECC, CAMM module 64 GB, 1 x 64 GB, DDR5, 4800 MHz, non-ECC, CAMM module 128 GB, 1 x 128 GB, DDR5, 3600 MHz, non-ECC, CAMM module

External ports

The following table lists the external ports of your Precision 7770.

Table 7. External ports

Description	Values
Network port	One RJ45 Ethernet port
USB ports	<ul style="list-style-type: none"> Two Thunderbolt 4 ports (USB Type-C) One USB 3.2 Gen 2 Type-C port with DisplayPort alt mode One USB 3.2 Gen 1 port with PowerShare One USB 3.2 Gen 1 port
Audio port	One universal audio jack
Video port	<ul style="list-style-type: none"> Two Thunderbolt 4 ports (USB Type-C) One HDMI 2.0a port (UMA) One HDMI 2.1 port (DGPU)
Media-card reader	One SD-card slot
Power-adaptor port	<ul style="list-style-type: none"> 180 W AC adapter, 7.40 mm - SFF 240 W AC adapter, 7.40 mm - SFF
Security-cable slot	One wedge-shaped security slot

Internal slots

The following table lists the internal slots of your Precision 7770.

Table 8. Internal slots

Description	Values
M.2	<ul style="list-style-type: none"> One WWAN One WLAN Four M.2 solid-state drive <p>NOTE: To learn more about the features of different types of M.2 cards, search in the Knowledge Base Resource at www.dell.com/support.</p>

Ethernet

The following table lists the wired Ethernet Local Area Network (LAN) specifications of your Precision 7770.

Table 9. Ethernet specifications

Description	Values
Model number	Intel i219LM
Transfer rate	10/100/1000 Mbps

Wireless module

The following table lists the Wireless Local Area Network (WLAN) module supported on your Precision 7770.

Table 10. Wireless module specifications

Description	Values
Model number	Intel AX211
Transfer rate	Up to 2400 Mbps
Frequency bands supported	2.4 GHz/5 GHz/6 GHz  NOTE: The 6 GHz frequency is supported on computers installed with Windows 11 operating system only.
Wireless standards	<ul style="list-style-type: none">• WiFi 802.11a/b/g• Wi-Fi 4 (Wi-Fi 802.11n)• Wi-Fi 5 (WiFi 802.11ac)• Wi-Fi 6E (WiFi 802.11ax)  NOTE: 160 MHz channel use, MU-MIMO, new 6 GHz band
Encryption	<ul style="list-style-type: none">• 64-bit and 128-bit WEP• AES-CCMP• TKIP
Bluetooth	Bluetooth 5.2

WWAN module

The following table lists the Wireless Wide Area Network (WWAN) module that is supported on your Precision 7770.

Table 11. WWAN module specifications

Description	Option one
Model number	DW5930e, Qualcomm Snapdragon SDX55 5G
Transfer rate	Up to 3 Gbps DL/250 Mbps UL (3GPP Release15 NR/LTE CAT20)
Frequency bands supported	<ul style="list-style-type: none">• NR: (1, 2, 3, 5, 7, 8, 12, 20, 28, 38, 41, 66, 71, 77, 78, 79)• LTE: (1, 2, 3, 4, 5, 7, 8, 12, 13, 14, 17, 18, 19, 20, 25, 26, 28, 29, 30, 32, 38, 39, 40, 41, 42, 43, 46, 66)

Table 11. WWAN module specifications (continued)

Description	Option one
	<ul style="list-style-type: none"> HSPA+: (1, 2, 4, 5, 6, 8, 9, 19)
Wireless standards	<ul style="list-style-type: none"> NR FR1(Sub6) FDD/TDD LTE FDD/TDD WCDMA/HSPA+ GPS/GLONASS/Beidou/Galileo
Encryption	Not supported
Global Navigation Satellite System (GNSS)	Supports GPS, and GLONASS
<p>NOTE: For instructions on how to find your computer's IMEI (International Mobile Station Equipment Identity) number, see the knowledge base article 000143678 at www.dell.com/support.</p>	

Audio

The following table lists the audio specifications of your Precision 7770.

Table 12. Audio specifications

Description	Values	
Audio controller	Realtek ALC711-VD	
Stereo conversion	Supported	
Internal audio interface	SoundWire	
External audio interface	One universal audio jack	
Number of speakers	Four (Two tweeter speakers and two woofer speakers)	
Internal-speaker amplifier	Realtek ALC1319D	
External volume controls	Keyboard shortcut controls	
Speaker output:		
	Average speaker output	2 W + 2 W (tweeter), 2 W + 2 W (woofer)
	Peak speaker output	2.5 W + 2.5 W (tweeter), 2.5 W + 2.5 W (woofer)
Subwoofer output	Not supported	
Microphone	Dual digital-array microphones	

Storage

This section lists the storage options on your Precision 7770.

- M.2 2230 PCIe NVMe Gen4 x4, Class 35 SSD
- M.2 2280 PCIe NVMe Gen4 x4, Class 40 SSD
- M.2 2280 PCIe NVMe Gen3 x4, Class 40 SED (Self-Encrypting Drive)

Table 13. Storage specifications

Storage type	Interface type	Capacity
M.2 2230 Class 35 SSD	PCIe NVMe Gen4 x4	256 GB
M.2 2280 Class 40 SSD	PCIe NVMe Gen4 x4	Up to 4 TB
M.2 2280 Class 40 SED (Self-Encrypting Drive)	PCIe NVMe Gen3 x4	Up to 1 TB

RAID (Redundant Array of Independent Disks)

For optimal performance when configuring drives as a RAID volume, Dell recommends drive models that are identical.

NOTE: RAID is not supported on Intel Optane configurations.

RAID 0 (Striped, Performance) volumes benefit from higher performance when drives are matched because the data is split across multiple drives: any IO operations with block sizes larger than the stripe size will split the IO and become constrained by the slowest of the drives. For RAID 0 IO operations where block sizes are smaller than the stripe size, whichever drive the IO operation targets will determine the performance, which increases variability and results in inconsistent latencies. This variability is particularly pronounced for write operations and it can be problematic for applications that are latency sensitive. One such example of this is any application that performs thousands of random writes per second in very small block sizes.

RAID 1 (Mirrored, Data Protection) volumes benefit from higher performance when drives are matched because the data is mirrored across multiple drives: all IO operations must be performed identically to both drives, thus variations in drive performance when the models are different, results in the IO operations completing only as fast as the slowest drive. While this does not suffer the variable latency issue in small random IO operations as with RAID 0 across heterogeneous drives, the impact is nonetheless large because the higher performing drive becomes limited in all IO types. One of the worst examples of constrained performance here is when using unbuffered IO. To ensure writes are fully committed to non-volatile regions of the RAID volume, unbuffered IO bypasses cache (for example by using the Force Unit Access bit in the NVMe protocol) and the IO operation will not complete until all the drives in the RAID volume have completed the request to commit the data. This kind of IO operation completely negates any advantage of a higher performing drive in the volume.

Care must be taken to match not only the drive vendor, capacity, and class, but also the specific model. Drives from the same vendor, with the same capacity, and even within the same class, can have very different performance characteristics for certain types of IO operations. Thus, matching by model ensures that the RAID volumes is comprised of an homogeneous array of drives that will deliver all the benefits of a RAID volume without incurring the additional penalties when one or more drives in the volume are lower performing.

Precision 7770 supports RAID with more than one hard drive configuration.

Media-card reader

The following table lists the media cards supported by your Precision 7770.

Table 14. Media-card reader specifications

Description	Values
Media-card type	SD card
Media-cards supported	<ul style="list-style-type: none"> Secure Digital (SD) Secure Digital High Capacity (SDHC) Secure Digital Extended Capacity (SDXC)
<p>NOTE: The maximum capacity supported by the media-card reader varies depending on the standard of the media card installed in your computer.</p>	

Keyboard

The following table lists the keyboard specifications of your Precision 7770.

Table 15. Keyboard specifications

Description	Values
Keyboard type	Backlit keyboard
Keyboard layout	QWERTY
Number of keys	<ul style="list-style-type: none"> • United States and Canada: 99 keys • United Kingdom: 103 keys • Japan: 106 keys
Keyboard size	X=19.05 mm key pitch Y=18.05 mm key pitch
Keyboard shortcuts	<p>Some keys on your keyboard have two symbols on them. These keys can be used to type alternate characters or to perform secondary functions. To type the alternate character, press Shift and the desired key. To perform secondary functions, press Fn and the desired key.</p> <p>NOTE: You can define the primary behavior of the function keys (F1–F12) changing Function Key Behavior in BIOS setup program.</p>

Camera

The following table lists the camera specifications of your Precision 7770.

Table 16. Camera specifications

Description	Values
Number of cameras	One
Camera type	There are two camera options: <ul style="list-style-type: none"> • FHD RGB • FHD IR
Camera location	Front camera
Camera sensor type	Proximity sensor technology
Camera resolution:	
Still image	0.92 megapixel
Video	1920 x 1080 (FHD) at 30 fps
Infrared camera resolution:	
Still image	0.30 megapixel
Video	1920 x 1080 (FHD) at 30 fps
Diagonal viewing angle:	

Table 16. Camera specifications (continued)

Description		Values
	Camera	74.9 degrees
	Infrared camera	70 degrees

Touchpad

The following table lists the touchpad specifications of your Precision 7770.

Table 17. Touchpad specifications

Description		Values
Touchpad resolution:		
	Horizontal	>300 dpi
	Vertical	761
Touchpad dimensions:		
	Horizontal	115.00 mm (4.52 in.)
	Vertical	80.00 mm (3.14 in.)
Touchpad gestures		For more information about touchpad gestures available on Windows, see the Microsoft knowledge base article at support.microsoft.com .

Power adapter

The following table lists the power adapter specifications of your Precision 7770.

Table 18. Power adapter specifications

Description	Option one	Option two
Type	180 W AC adapter, 7.4 mm - SFF	240 W AC adapter, 7.4 mm - SFF
Connector dimensions:		
External diameter	7.40 mm	7.40 mm
Internal diameter	5.10 mm	5.10 mm
Power-adapter dimensions:		
Height	22 mm (0.8 in.)	22 mm (0.8 in.)
Width	66 mm (2.6 in.)	66 mm (2.6 in.)
Depth	130 mm (5.1 in.)	143 mm (5.6 in.)
Input voltage	100 VAC x 240 VAC	100 VAC x 240 VAC
Input frequency	50 Hz to 60 Hz	50 Hz to 60 Hz
Input current (maximum)	2.34 A	3.50 A

Table 18. Power adapter specifications (continued)

Description		Option one	Option two
Output current (continuous)		9.23 A	12.30 A
Rated output voltage		19.50 VDC	19.50 VDC
Temperature range:			
	Operating	0°C to 40°C (32°F to 104°F)	0°C to 40°C (32°F to 104°F)
	Storage	-40°C to 70°C (-40°F to 158°F)	-40°C to 70°C (-40°F to 158°F)
 CAUTION: Operating and storage temperature ranges may differ among components, so operating or storing the device outside these ranges may impact the performance of specific components.			

Battery

The following table lists the battery specifications of your Precision 7770.

Table 19. Battery specifications

Description		Option one	Option two
Battery type		6-cell, 83 Wh, Lithium-ion, ExpressCharge 2.0	6-cell, 93 WHr, Lithium-ion, ExpressCharge and ExpressChargeBoost
Battery voltage		11.55 V (Nominal)	11.55 V (Nominal)
Battery weight (maximum)		0.383 kg (0.844 lb)	0.41 kg (0.90 lb)
Battery dimensions:			
	Height	10.75 mm (0.42 in.)	13.25 mm (0.52 in.)
	Width	296.75 mm (11.68 in.)	272.40 mm (10.72 in.)
	Depth	66.68 mm (2.62 in.)	66.68 mm (2.62 in.)
Temperature range:			
	Operating	0°C-50°C (32°F-122°F)	0°C-50°C (32°F-122°F)
	Storage	-20°C-60°C (-4°F-140°F)	-20°C-60°C (4°F-140°F)
Battery operating time		Varies depending on operating conditions and can significantly reduce under certain power-intensive conditions.	Varies depending on operating conditions and can significantly reduce under certain power-intensive conditions.
Battery charging time (approximate)  NOTE: Control the charging time, duration, start and end time, and so on using the Dell Power Manager application. For more information on the Dell Power Manager see, <i>Me and My Dell</i> on www.dell.com .		<ul style="list-style-type: none"> ExpressCharge 2.0: From 0% up to 35% in as little as 20 minutes Express charge: 2 hrs Standard charge: 3 hrs 	<ul style="list-style-type: none"> ExpressCharge Boost: From 0% up to 35% in as little as 20 minutes Express charge: 2 hrs Standard charge: 3 hrs
Coin-cell battery		Supported  NOTE: It is recommended that you use a Dell coin-cell battery for your	Supported  NOTE: It is recommended that you use a Dell coin-cell battery for your

Table 19. Battery specifications (continued)

Description	Option one	Option two
	computer. Dell does not provide warranty coverage for problems caused by using accessories, parts, or components not supplied by Dell.	computer. Dell does not provide warranty coverage for problems caused by using accessories, parts, or components not supplied by Dell.
<p>CAUTION: Operating and storage temperature ranges may differ among components, so operating or storing the device outside these ranges may impact the performance of specific components.</p> <p>CAUTION: Dell recommends that you charge the battery regularly for optimal power consumption. If your battery charge is completely depleted, connect the power adapter, turn on your computer, and then restart your computer to reduce the power consumption.</p>		

Display

The following table lists the display specifications of your Precision 7770.

Table 20. Display specifications

Description	Option one	Option two
Display type	17.3-inch Full High Definition (FHD)	17.3-inch Ultra High Definition (UHD)
Display-panel technology	Wide-viewing angle (WVA)	Wide-viewing angle (WVA), WLED
Display-panel dimensions (active area):		
Height	214.81 mm (8.46 in.)	214.81 mm (8.46 in.)
Width	381.89 mm (15.04 in.)	381.89 mm (15.04 in.)
Diagonal	438.16 mm (17.30 in.)	438.16 mm (17.30 in.)
Display-panel native resolution	1920 x 1080	3840 x 2160
Luminance (typical)	500 nits	500 nits
Megapixels	2.07	8.29
Color gamut	99% DCIP3 typical	99% DCIP3 typical
Pixels Per Inch (PPI)	127	255
Contrast ratio (min.)	<ul style="list-style-type: none"> ● 1000:1 (typical) ● 800:1 (minimum) 	<ul style="list-style-type: none"> ● 1200:1 (typical) ● 1000:1 (minimum)
Response time (max.)	35 ms	35 ms
Refresh rate	60 Hz	120 Hz
Horizontal view angle	+/- 80 degrees (minimum)	+/- 80 degrees (minimum)
Vertical view angle	+/- 80 degrees (minimum)	+/- 80 degrees (minimum)
Pixel pitch	0.198 mm x 0.198 mm	0.099 mm x 0.099 mm
Power consumption (maximum)	9 W	10.3 W

Table 20. Display specifications (continued)

Description	Option one	Option two
Anti-glare vs glossy finish	Anti-glare	Anti-glare
Touch options	No	No

Fingerprint reader

The following table lists the fingerprint-reader specifications of your Precision 7770.

Table 21. Fingerprint reader specifications

Description	Values
Fingerprint-reader sensor technology	Capacitive
Fingerprint-reader sensor resolution	500 DPI
Fingerprint-reader sensor pixel size	<ul style="list-style-type: none">• X: 108• Y: 88

Sensor

The following table lists the sensor of your Precision 7770.

Table 22. Sensor

Sensor support
Ambient Light Sensor
Windows Auto Brightness
Accelerometer
Adaptive Thermal Performance (Lap vs. Desk mode) requires Accelerometer  NOTE: This is for thermal only.
Hall Effect Sensor
Sensor Hub
Proximity for SAR compliance (for the WWAN module) Near Field Proximity Sensor

GPU—Integrated

The following table lists the specifications of the integrated Graphics Processing Unit (GPU) supported by your Precision 7770.

Table 23. GPU—Integrated

Controller	Memory size	Processor
Intel UHD Graphics	Shared system memory	Intel 12 th Generation Intel Core i5/i7/i9

Multiple display support matrix

The following table lists the multiple display support matrix for your Precision 7770.

Table 24. Multiple display support matrix

Graphics Card	Direct Graphics Controller Direct Output Mode	Supported external displays with computer internal display on	Supported external displays with computer internal display off
Intel UHD Graphics	Integrated	3	4

GPU — Discrete

The following table lists the specifications of the discrete graphics processing unit (GPU) supported by your Precision 7770.

Table 25. GPU — Discrete

Controller	External display support	Memory size	Memory type
NVIDIA RTX A1000	One DisplayPort 1.4	4 GB	GDDR6
NVIDIA RTX A3000	One DisplayPort 1.4	12 GB	GDDR6
NVIDIA RTX A4500	One DisplayPort 1.4	16 GB	GDDR6
NVIDIA RTX A5500	One DisplayPort 1.4	16 GB	GDDR6
NVIDIA GeForce RTX 3080Ti	One DisplayPort 1.4	16 GB	GDDR6

Multiple display support matrix

The following table lists the multiple display support matrix for your Precision 7770.

Table 26. Multiple display support matrix

Graphics Card	Direct Graphics Controller Direct Output Mode	Supported external displays with computer internal display on	Supported external displays with computer internal display off
NVIDIA RTX A1000	<ul style="list-style-type: none"> ● MS Hybrid ● Direct Output Mode ● Discrete Mode 	<ul style="list-style-type: none"> ● 4 ● 4 ● 3 	4
NVIDIA RTX A3000	<ul style="list-style-type: none"> ● MS Hybrid ● Direct Output Mode ● Discrete Mode 	<ul style="list-style-type: none"> ● 4 ● 4 ● 3 	4
NVIDIA RTX A4500	<ul style="list-style-type: none"> ● MS Hybrid ● Direct Output Mode ● Discrete Mode 	<ul style="list-style-type: none"> ● 4 ● 4 ● 3 	4
NVIDIA RTX A5500	<ul style="list-style-type: none"> ● MS Hybrid ● Direct Output Mode ● Discrete Mode 	<ul style="list-style-type: none"> ● 4 ● 4 ● 3 	4
NVIDIA GeForce RTX 3080Ti	<ul style="list-style-type: none"> ● MS Hybrid ● Direct Output Mode 	<ul style="list-style-type: none"> ● 4 ● 4 	4

Table 26. Multiple display support matrix (continued)

Graphics Card	Direct Graphics Controller Direct Output Mode	Supported external displays with computer internal display on	Supported external displays with computer internal display off
	<ul style="list-style-type: none"> Discrete Mode 	<ul style="list-style-type: none"> 3 	

Hardware security

The following table lists the hardware security of your Precision 7770.

Table 27. Hardware security

Hardware security
Trusted Platform Module (TPM) 2.0 discrete
FIPS 140-2 certification for TPM
TCG Certification for TPM (Trusted Computing Group)
Contacted Smart Card and Control Vault 3
Contactless Smart Card, NFC, and ControlVault 3
SED SSD NVMe, SSD and HDD (Opal and non-Opal) per SDL
Finger Print Reader in Power Button tied to Control vault 3
SED (Opal 2.0 only - PCIe Interface)
Chassis Intrusion Detection
Battery Removal Detection
RPMC SPI flash
SPI Flash Tamper Detection / Prevention Shunt Circuit

Smart-card reader

Contactless smart-card reader

This section lists the contactless smart-card reader specifications of your Precision 7770.

Table 28. Contactless smart-card reader specifications

Title	Description	Dell ControlVault 3 Contactless Smart-card reader with NFC
Felica Card Support	Reader and software capable of supporting Felica contactless cards	Yes
Prox (Proximity) (125 kHz) Card support	Reader and software capable of supporting Prox/Proximity/125 kHz contactless cards	No
ISO 14443 Type A Card Support	Reader and software capable of supporting ISO 14443 Type A contactless cards	Yes
ISO 14443 Type B Card Support	Reader and software capable of supporting ISO 14443 Type B contactless cards	Yes

Table 28. Contactless smart-card reader specifications (continued)

Title	Description	Dell ControlVault 3 Contactless Smart-card reader with NFC
ISO/IEC 21481	Reader and software capable of supporting ISO/IEC 21481 compliant contactless cards and tokens	Yes
ISO/IEC 18092	Reader and software capable of supporting ISO/IEC 21481 compliant contactless cards and tokens	Yes
ISO 15693 Card Support	Reader and software capable of supporting ISO15693 contactless cards	Yes
NFC Tag Support	Supports reading and processing of NFC compliant tag information	Yes
NFC Reader Mode	Support for NFC Forum Defined Reader mode	Yes
NFC Writer Mode	Support for NFC Forum Defined Writer mode	Yes
NFC Peer-to-Peer Mode	Support for NFC Forum Defined Peer to Peer mode	Yes
NFC Proximity OS Interface	Enumerates NFP (Near Field Proximity) device for OS to utilize	Yes
PC/SC OS interface	Personal Computer/Smart-Card specification for integration of hardware readers into personal computer environments	Yes
CCID driver compliance	Common driver support for Integrated Circuit Card Interface Device for OS level drivers	Yes
Dell ControlVault support	Device connects to Dell ControlVault for usage and processing	Yes

 **NOTE:** 125 Khz proximity cards are not supported.

Table 29. Supported cards

Manufacturer	Card	Supported
HID	jCOP readertest3 A card (14443a)	Yes
	1430 1L	
	DESFire D8H	
	iClass (Legacy)	
	iClass SEOS	
NXP/Mifare	Mifare DESFire 8K White PVC Cards	Yes
	Mifare Classic 1K White PVC Cards	
	NXP Mifare Classic S50 ISO Card	
G&D	idOnDemand - SCE3.2 144K	Yes
	SCE6.0 FIPS 80K Dual+ 1 K Mifare	
	SCE6.0 nonFIPS 80K Dual+ 1 K Mifare	
	SCE6.0 FIPS 144K Dual + 1K Mifare	

Table 29. Supported cards (continued)

Manufacturer	Card	Supported
	SCE6.0 nonFIPS 144K Dual + 1 K Mifare	
	SCE7.0 FIPS 144K	
Oberthur	idOnDemand - OCS5.2 80K	Yes
	ID-One Cosmo 64 RSA D V5.4 T=0 card	
	ID-One Cosmo 128K V5.5 card	
Gemalto	TOP DL GX4 144K card	Yes
Sony	Felica RC-S962	Yes
	Felica RC-S966	Yes
PIVKey	C910 PKI	Yes
IDENTIV	PIV programmed cards	Yes

Contacted smart-card reader

The following table lists the contacted smart-card reader specifications of your Precision 7770.

Table 30. Contacted smart-card reader specifications

Title	Description	Dell ControlVault 3 Smart-card reader
ISO 7816 -3 Class A Card Support	Reader capable of reading 5 V powered smart-card	Yes
ISO 7816 -3 Class B Card Support	Reader capable of reading 3 V powered smart-card	Yes
ISO 7816 -3 Class C Card support	Reader capable of reading 1.8 V powered smart-card	Yes
T=0 support	Cards support character level transmission	Yes
T=1 support	Cards support block level transmission	Yes
EMVCo Compliant	Compliant with EMVCo (for electronic payment standards) smart-card standards as posted to www.emvco.com	Yes
EMVCo Certified	Formally certified based on EMVCO smart-card standards	Yes
PC/SC OS interface	Personal Computer/Smart-Card specification for integration of hardware readers into personal computer environments	Yes
CCID driver compliance	Common driver support for Integrated Circuit Card Interface Device for OS level drivers.	Yes
Dell ControlVault support	Device connects to Dell ControlVault for usage and processing	Yes

Operating and storage environment

This table lists the operating and storage specifications of your Precision 7770.

Airborne contaminant level: G1 as defined by ISA-S71.04-1985

Table 31. Computer environment

Description	Operating	Storage
Temperature range	0°C to 35°C (32°F to 95°F)	-40°C to 65°C (-40°F to 149°F)
Relative humidity (maximum)	10% to 90% (non-condensing)	0% to 95% (non-condensing)
Vibration (maximum)*	0.66 GRMS	1.30 GRMS
Shock (maximum)	110 G†	160 G†
Altitude range	-15.2 m to 3048 m (-49.8 ft to 10000 ft)	-15.2 m to 10668 m (-49.8 ft to 35000 ft)
 CAUTION: Operating and storage temperature ranges may differ among components, so operating or storing the device outside these ranges may impact the performance of specific components.		

* Measured using a random vibration spectrum that simulates user environment.

† Measured using a 2 ms half-sine pulse.

Keyboard shortcuts of Precision 7770

NOTE: Keyboard characters may differ depending on the keyboard language configuration. Keys used for shortcuts remain the same across all language configurations.

Some keys on your keyboard have two symbols on them. These keys can be used to type alternate characters or to perform secondary functions. The symbol shown on the lower part of the key refers to the character that is typed out when the key is pressed. If you press shift and the key, the symbol shown on the upper part of the key is typed out. For example, if you press **2**, **2** is typed out; if you press **Shift + 2**, **@** is typed out.

The keys F1-F12 at the top row of the keyboard are function keys for multi-media control, as indicated by the icon at the bottom of the key. Press the function key to invoke the task represented by the icon. For example, pressing F1 mutes the audio (refer to the table below).

However, if the function keys F1-F12 are needed for specific software applications, multi-media functionality can be disabled by pressing **Fn + Esc**. Subsequently, multi-media control can be invoked by pressing **Fn** and the respective function key. For example, mute audio by pressing **Fn + F1**.

NOTE: You can also define the primary behavior of the function keys (F1–F12) by changing **Function Key Behavior** in BIOS setup program.

Table 32. List of keyboard shortcuts

Function key	Primary behavior
F1	Mute audio
F2	Decrease volume
F3	Increase volume
F4	Play previous track/chapter
F5	Play/Pause
F6	Play next track/chapter.
F8	Switch to external display
F9	Search
F10	Click keyboard backlight (optional). NOTE: Non-backlight keyboards have F10 function key without the backlight icon and do not support toggle keyboard backlight function. NOTE: Toggle to cycle the keyboard backlight status through off, low-backlight, and high-backlight
F11	Decrease brightness
F12	Increase brightness

The **Fn** key is also used with selected keys on the keyboard to invoke other secondary functions.

Table 33. Secondary behavior

Function key	Secondary behavior
Fn + F1	Operating system and application specific F1 behavior
Fn + F2	Operating system and application specific F2 behavior
Fn + F3	Operating system and application specific F3 behavior
Fn + F4	Operating system and application specific F4 behavior

Table 33. Secondary behavior (continued)

Function key	Secondary behavior
Fn + F5	Operating system and application specific F5 behavior
Fn + F6	Operating system and application specific F6 behavior
Fn + F8	Operating system and application specific F8 behavior
Fn + F9	Operating system and application specific F9 behavior
Fn + F10	Operating system and application specific F10 behavior
Fn + F11	Operating system and application specific F11 behavior
Fn + F12	Operating system and application specific F12 behavior
Fn + PrtScr	Turn off/on wireless
Fn + B	Pause/Break
Fn + Insert	Sleep
Fn + S	Toggle scroll lock
Fn + H	Toggle between power and battery-status light/hard-drive activity light
Fn + R	System request
Fn + Ctrl	Open application menu
Fn + Esc	Toggle Fn-key lock
Fn + PgUp	Page up
Fn + PgDn	Page down
Fn + Home	Home
Fn + End	End

Getting help and contacting Dell

Self-help resources

You can get information and help on Dell products and services using these self-help resources:

Table 34. Self-help resources

Self-help resources	Resource location
Information about Dell products and services	www.dell.com
My Dell app	
Tips	
Contact Support	In Windows search, type <code>Contact Support</code> , and press Enter.
Online help for operating system	www.dell.com/support/windows www.dell.com/support/linux
Access top solutions, diagnostics, drivers and downloads, and learn more about your computer through videos, manuals and documents.	Your Dell computer is uniquely identified by a Service Tag or Express Service Code. To view relevant support resources for your Dell computer, enter the Service Tag or Express Service Code at www.dell.com/support . For more information on how to find the Service Tag for your computer, see Locate the Service Tag on your computer .
Dell knowledge base articles for a variety of computer concerns	<ol style="list-style-type: none"> 1. Go to www.dell.com/support. 2. On the menu bar at the top of the Support page, select Support > Knowledge Base. 3. In the Search field on the Knowledge Base page, type the keyword, topic, or model number, and then click or tap the search icon to view the related articles.

Contacting Dell

To contact Dell for sales, technical support, or customer service issues, see www.dell.com/contactdell.

 **NOTE:** Availability varies by country/region and product, and some services may not be available in your country/region.

 **NOTE:** If you do not have an active Internet connection, you can find contact information about your purchase invoice, packing slip, bill, or Dell product catalog.