



Overview

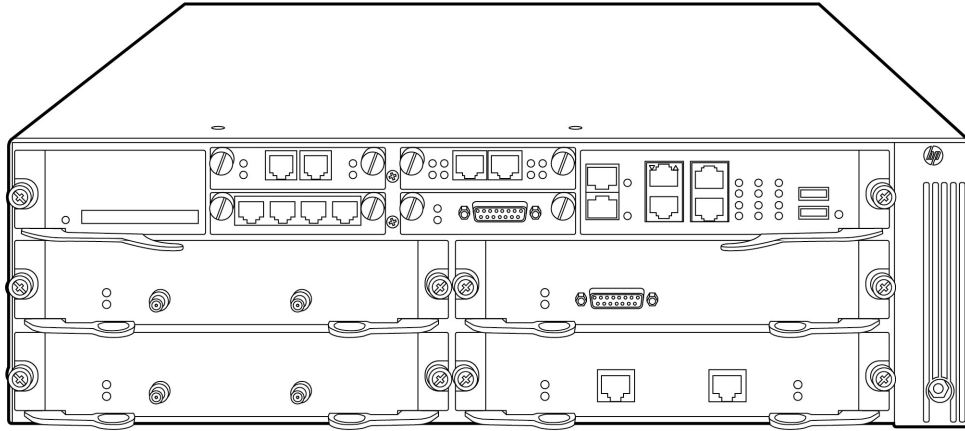

HP MSR50-40 Router

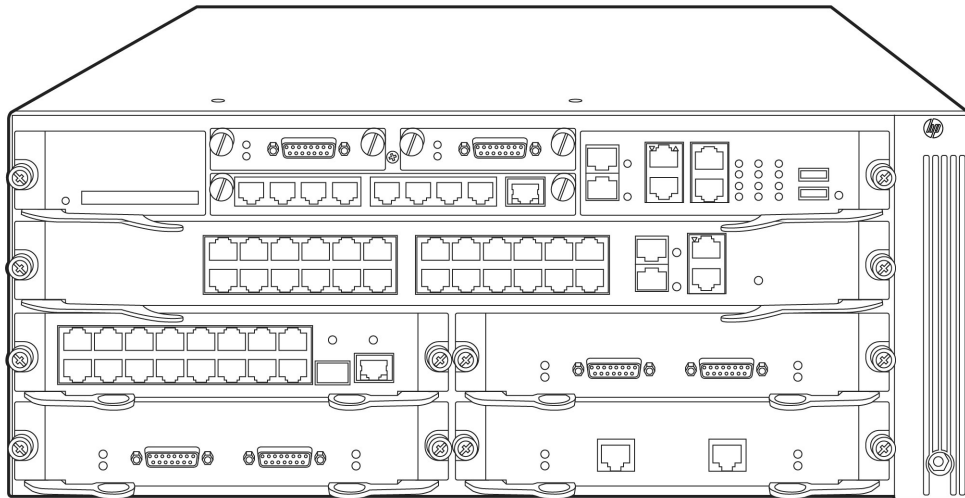

HP MSR50-60 Router

Models

HP MSR50-40 Router

HP MSR50-60 Router

HP MSR50-40 DC Router

HP MSR50-60 DC Router

JD433A

JF231A

JF285A

JF640A

Overview

Key features

- High-performance, modular LAN/WAN router
- Converged routing, switching, wireless, voice, and security
- Third-party applications and virtualized services platform
- Embedded encryption, firewall, and other security features
- High reliability, with available dual power supplies and hot-swappable modules

Product overview

HP MSR50 Series routers are a component of the HP FlexBranch solution, which is part of the HP FlexNetwork architecture.

These routers are designed for large branch offices, regional offices, and enterprise deployments that require high-performance converged routing, switching, wireless, security, voice, and virtualized applications.

The MSR50 Series has a rich set of modular WAN, LAN, and voice interface connectivity options, as well as embedded hardware-based encryption and voice processing. With optional Open Architecture Platform (OAP) modules, it can deliver VMware vSphere, an industry-leading virtualization platform that integrates third-party applications with the router

Features and benefits

Quality of Service (QoS)

- **Traffic policing:** supports Committed Access Rate (CAR) and line rate
- **Congestion management:** supports FIFO, PQ, CQ, WFQ, CBQ, and RTPQ
- **Congestion avoidance:** Weighted Random Early Detection (WRED)/Random Early Detection (RED)
- **Other QoS technologies:** supports traffic shaping, FR QoS, MPLS QoS, and MP QoS/LFI

Management

- **Management interface control:** provides management access through modem port and terminal interface; provides access through terminal interface, telnet, or SSH
- **Industry-standard CLI with a hierarchical structure:** reduces training time and expenses, and increases productivity in multivendor installations
- **Management security:** multiple privilege levels with password protection restrict access to critical configuration commands; ACLs provide telnet and SNMP access; local and remote syslog capabilities allow logging of all access
- **SNMPv1, v2, and v3:** provide complete support of SNMP; provide full support of industry-standard Management Information Base (MIB) plus private extensions; SNMPv3 supports increased security using encryption
- **Remote monitoring (RMON):** uses standard SNMP to monitor essential network functions; supports events, alarm, history, and statistics group plus a private alarm extension group
- **FTP, TFTP, and SFTP support:** FTP allows bidirectional transfers over a TCP/IP network and is used for configuration updates; Trivial FTP is a simpler method using User Datagram Protocol (UDP)
- **Debug and sampler utility:** supports ping and traceroute for both IPv4 and IPv6
- **Network Time Protocol (NTP):** synchronizes timekeeping among distributed time servers and clients; keeps timekeeping consistent among all clock-dependent devices within the network so that the devices can provide diverse applications based on the consistent time
- **Info center:** provides a central information center for system and network information; aggregates all logs, traps, and debugging information generated by the system and maintains them in order of severity; outputs the network information to multiple channels based on user-defined rules
- **Network Quality Analyzer (NQA):** analyzes network performance and service quality by sending test packets, and provides network performance and service quality parameters such as jitter, TCP, or FTP connection delays; allows network manager to

Overview

determine overall network performance and diagnose and locate network congestion points or failures

Connectivity

- **High-density port connectivity:** provides up to 10 interface module slots and up to 90 Fast Ethernet ports
- **Multiple WAN and LAN interfaces:** provide a traditional link with E3, T3, E1, T1, ADSL, ADSL2, ADSL2+, G.SHDSL, OC-3, POS, ATM, and ISDN/AM backup; deliver high-density Ethernet access with WAN Fast Ethernet/Gigabit Ethernet, LAN Fast Ethernet, and PoE; offer mobility access with IEEE 802.11b/g/n Wi-Fi and 3G
- **3G access support:** provides 3G wireless access for primary or backup connectivity via a 3G SIC module certified on various cellular networks; optional carrier 3G USB modems are available
- **Ideal IP telephony solutions:** support FXO, FXS, T1, E1, and BRI in various densities; provide Web browser-based administration, Smart Dial Routing, FXS and FXO 1:1 binding for all ports, Power to Escape to PSTN when IP failures occur, and Enhanced Local MSR Survivability
- **Flexible port selection:** provides combination of fiber and copper interface modules, 100/1000BASE-X auto-speed selection, and 10/100/1000BASE-T auto-speed detection plus auto duplex and MDI/MDI-X
- **Packet storm protection:** protects against broadcast, multicast, or unicast storms with user-defined thresholds
- **Loopback:** supports internal loopback testing for maintenance purposes and an increase in availability; loopback detection protects against incorrect cabling or network configurations and can be enabled on a per-port or per-VLAN basis for added flexibility

Performance

- **Excellent forwarding performance:** provides forwarding performance up to 800 Kpps/1280 Kpps (for two kinds of engines); meets current and future bandwidth-intensive application demands of enterprise businesses
- **Powerful encryption capacity:** includes embedded hardware encryption accelerator to improve encryption performance
- **Flexible chassis selection:** offers a choice of four or six FIC slot routers, meeting different requirements on enterprise branches

Resiliency and high availability

- **Hot swappable modules:** facilitate the replacement of hardware interface modules without impacting the traffic flow through the system
- **Dual internal power supply:** provides high reliability
- **Virtual Router Redundancy Protocol (VRRP):** allows groups of two routers to dynamically back each other up to create highly available routed environments; supports VRRP load balancing

Layer 2 switching

- **Spanning Tree Protocol (STP)**
fully supports standard IEEE 802.1D STP, IEEE 802.1w Rapid Spanning Tree Protocol (RSTP) for faster convergence, and IEEE 802.1s Multiple Spanning Tree Protocol (MSTP)
- **Internet Group Management Protocol (IGMP) and Multicast Listener Discovery (MLD) protocol snooping:** effectively control and manage the flooding of multicast packets in a Layer 2 network
- **Port mirroring:** duplicates port traffic (ingress and egress) to a local or remote monitoring port
- **VLANs:** support up to 4,094 ports or IEEE 802.1Q-based VLANs
- **sFlow:** allows traffic sampling

Layer 3 services

- **Address Resolution Protocol (ARP):** determines the MAC address of another IP host in the same subnet; supports static ARPs; gratuitous ARP allows detection of duplicate IP addresses; proxy ARP allows normal ARP operation between subnets or when subnets are separated by a Layer 2 network

Overview

- **User Datagram Protocol (UDP) helper:** redirects UDP broadcasts to specific IP subnets to prevent server spoofing
- **Dynamic Host Configuration Protocol (DHCP):** simplifies the management of large IP networks and supports client and server; DHCP Relay enables DHCP operation across subnets

Layer 3 routing

- **Static IPv4 routing:** provides simple, manually configured IPv4 routing
- **Routing Information Protocol (RIP)**
uses a distance vector algorithm with UDP packets for route determination; supports RIPv1 and RIPv2 routing; includes loop protection
- **Open Shortest Path First (OSPF)**
Interior Gateway Protocol (IGP) uses link-state protocol for faster convergence; supports ECMP, NSSA, and MD5 authentication for increased security and graceful restart for faster failure recovery
- **Border Gateway Protocol 4 (BGP-4)**
Exterior Gateway Protocol (EGP) with path vector protocol uses TCP for enhanced reliability for the route discovery process, reduces bandwidth consumption by advertising only incremental updates, and supports extensive policies for increased flexibility, as well as scales to very large networks
- **Intermediate system to intermediate system (IS-IS):** Interior Gateway Protocol (IGP) using path vector protocol, which is defined by the ISO organization for IS-IS routing and extended by IETF RFC 1195 to operate in both TCP/IP and the OSI reference model (Integrated IS-IS)
- **Static IPv6 routing:** provides simple, manually configured IPv6 routing
- **Dual IP stack:** maintains separate stacks for IPv4 and IPv6 to ease the transition from an IPv4-only network to an IPv6-only network design
- **Routing Information Protocol next generation (RIPng):** extends RIPv2 to support IPv6 addressing
- **OSPFv3:** provides OSPF support for IPv6
- **BGP+:** extends BGP-4 to support Multiprotocol BGP (MBGP), including support for IPv6 addressing
- **IS-IS for IPv6:** extends IS-IS to support IPv6 addressing
- **IPv6 tunneling:** is an important element for the transition from IPv4 to IPv6; allows IPv6 packets to traverse IPv4-only networks by encapsulating the IPv6 packet into a standard IPv4 packet; supports manually configured, 6to4, and Intra-Site Automatic Tunnel Addressing Protocol (ISATAP) tunnels
- **Multiprotocol Label Switching (MPLS):** uses BGP to advertise routes across Label Switched Paths (LSPs), but uses simple labels to forward packets from any Layer 2 or Layer 3 protocol, thus reducing complexity and increasing performance; supports graceful restart for reduced failure impact; supports LSP tunneling and multilevel stacks
- **Multiprotocol Label Switching (MPLS) Layer 3 VPN:** allows Layer 3 VPNs across a provider network; uses MP-BGP to establish private routes for increased security; supports RFC 2547bis multiple autonomous system VPNs for added flexibility; supports IPv6 MPLS VPN
- **Multiprotocol Label Switching (MPLS) Layer 2 VPN:** establishes simple Layer 2 point-to-point VPNs across a provider network using only MPLS Label Distribution Protocol (LDP); requires no routing and therefore decreases complexity, increases performance, and allows VPNs of non-routable protocols; uses no routing information for increased security; supports Circuit Cross Connect (CCC), Static Virtual Circuits (SVCs), Martini draft, and Kompella-draft technologies
- **Policy routing:** allows custom filters for increased performance and security; supports ACLs, IP prefix, AS paths, community lists, and aggregate policies

Security

- **Access control list (ACL):** supports powerful ACLs for both IPv4 and IPv6; ACLs are used for filtering traffic to prevent illegal users from accessing the network, or for controlling network traffic to save resources; rules can either deny or permit traffic to be forwarded; rules can be based on a Layer 2 header or a Layer 3 protocol header; rules can be set to operate on specific dates or times
- **Media access control (MAC) authentication:** provides simple authentication based on a user's MAC address; supports local or

Overview

RADIUS-based authentication

- **Terminal Access Controller Access-Control System (TACACS+)**
is an authentication tool using TCP with encryption of the full authentication request that provides additional security
- **Network login:** standard IEEE 802.1X allows authentication of multiple users per port
- **RADIUS:** eases security access administration by using a password authentication server
- **Network address translation (NAT):** supports one-to-one NAT, many-to-many NAT, and NAT control, enabling NAT-PT to support multiple connections; supports blacklist in NAT/NAT-PT, a limit on the number of connections, session logs, and multi-instances
- **Secure Shell (SSHv2):** uses external servers to securely login into a remote device or securely login into the router from a remote location; with authentication and encryption, it protects against IP spoofing and plain text password interception; increases the security of SFTP transfers
- **Unicast Reverse Path Forwarding (URPF):** allows normal packets to be forwarded correctly, but discards the attaching packet due to lack of reverse path route or incorrect inbound interface; prevents source spoofing and distributed attacks
- **IPSec VPN:** supports DES, 3DES, and AES 128/192/256 encryption, and MD5 and SHA-1 authentication
- **Dynamic Virtual Private Network (DVPN)**
collects, maintains, and distributes dynamic public addresses through the VPN Address Management (VAM) protocol, making VPN establishment available between enterprise branches that use dynamic addresses to access the public network; compared to traditional VPN technologies, DVPN technology is more flexible and has richer features, such as NAT traversal of DVPN packets, AAA identity authentication, IPSec protection of data packets, and multiple VPN domains

Convergence

- **Internet Group Management Protocol (IGMP):** is used by IP hosts to establish and maintain multicast groups; supports v1, v2, and v3; utilizes Any-Source Multicast (ASM) or Source-Specific Multicast (SSM) to manage IPv4 multicast networks
- **Protocol Independent Multicast (PIM):** is used for IPv4 and IPv6 multicast applications; supports PIM Dense Mode (PIM-DM), Sparse Mode (PIM-SM), and Source-Specific Mode (PIM-SSM)
- **Multicast Source Discovery Protocol (MSDP):** is used for inter-domain multicast applications, allowing multiple PIM-SM domains to interoperate
- **Multicast Border Gateway Protocol (MBGP):** allows multicast traffic to be forwarded across BGP networks and kept separate from unicast traffic

Integration

- **Open Application Architecture (OAA):** provides high-performance application-specific modules fully integrated with the switching architecture; uses the chassis high-speed backplane to access network-related data; increases performance, reduces costs, and simplifies network management
- **Embedded NetStream:** local and global server load-balancing module improves traffic distribution using powerful scheduling algorithms, including Layer 4 to 7 services; monitors the health status of servers and firewalls
- **Embedded VPN firewall:** provides enhanced stateful packet inspection and filtering; delivers advanced VPN services with Triple DES (3DES) and Advanced Encryption Standard (AES) encryption at high performance and low latency, Web content filtering, and application prioritization and enhancement

Additional information

- **OPEX savings:** are delivered through the use of a common operating system that simplifies and streamlines deployment, management, and training, thereby cutting costs as well as reducing the chance for human errors associated with having to manage multiple operating systems across different platforms and network layers
- **High reliability:** provides a state-of-the-art unified code base
- **Faster time to market:** engineering efficiencies allow new and custom features to be brought rapidly to the market with better initial and ongoing stability

Overview

- **Green initiative support:** provides support for RoHS and WEEE regulations

Product architecture

- **Ideal multiservice platform**
provides a WAN router, Ethernet switch, wireless LAN, 3G WAN, firewall, VPN, and SIP/voice gateway all in one box
- **High-density voice interfaces**
provide flexible analog and digital voice interface options for easy integration within a wide range of deployments
- **Embedded service modules for security and voice**
embedded Voice Co-Processing Modules (VCPMs) and Voice Processing Modules (VPMs) accommodate digital signal processor (DSP) modules for voice packet processing; embedded hardware encryption modules, Standard Network Data Encryption (SNDE) cards, and Advanced Network Data Encryption (ANDE) cards do not occupy I/O slots
- **Open Application Platform (OAP) and virtualization**
are available on HP MSR Open Architecture Platform (OAP) Module with VMware vSphere; offer an industry-leading virtualization platform which integrates third-party applications with the MSR series routers; provide application and services flexibility; deliver the potential functionality of multiple devices, creating capital and operational expense savings and lasting investment protection
- **USB interface**
uses USB memory disk to download and upload configuration files; supports an external USB 3G modem for a 3G WAN uplink
- **Flexible modular design**
includes multiple types of modules that meet different requirements, such as Smart Interface Cards (SICs), which are small and cost-effective modules; Multi-functional Interface Modules (MIMs), which are more high-density and affordable modules; Flexible Interface Cards (FICs), which provide high reliability and are hot-swappable; and double-width modules, which provide high density
- **SIP trunk**
the SIP trunk link can carry multiple concurrent calls, and the carrier authenticates only the link, rather than carrying each SIP call on this link

Warranty and support

- **1-year warranty:** with advance replacement and 30-calendar-day delivery (available in most countries)
- **Electronic and telephone support:** limited electronic and telephone support is available from HP; to reach our support centers, refer to: www.hp.com/networking/contact-support; for details on the duration of support provided with your product purchase, refer to: www.hp.com/networking/warrantysummary
- **Software releases:** to find software for your product, refer to: www.hp.com/networking/support; for details on the software releases available with your product purchase, refer to: www.hp.com/networking/warrantysummary

Configuration

Build To Order:

BTO is a standalone unit with no integration. BTO products ship standalone are not part of a CTO or Rack-Shippable solution.

Standard Switch Enclosures

HP MSR50-40 Router

- 4 - FIC module slots
- Must select at least 1 Main Processing Unit
- Must select at least 1 Multi Service Module
- 1 - 350w AC Power Supply included
- 3U - Height

JD433A
See Configuration
Note:9

HP MSR50-40 DC Router

- 4 - FIC module slots
- Must select at least 1 Main Processing Unit
- Must select at least 1 Multi Service Module
- 1 - 350w DC Power Supply included
- 3U - Height

JF285A

HP MSR50-60 Router

- 6 - FIC module slots
- Must select at least 1 Main Processing Unit
- Must select at least 1 Multi Service Module
- 1 - 350w AC Power Supply included
- 4U - Height

JF231A
See Configuration
Note:9

HP MSR50-60 Rtr Chassis w DC PwrSupply

- 6 - FIC module slots
- Must select at least 1 Main Processing Unit
- Must select at least 1 Multi Service Module
- 1 - 350w DC Power Supply included
- 4U - Height

JF640A

Configuration Rules:

Note 9 Localization required. (See Localization Menu)

CTO Models

CTO Solution Sku

HP MSR CTO Router Solution

- SSP trigger sku

JG500A
See Configuration
Note:10

CTO Base Sku



Configuration

HP MSR50-40 Router

- 4 - FIC module slots
- Must select at least 1 Main Processing Unit
- Must select at least 1 Multi Service Module
- 1 - 350w AC Power Supply included
- 3U - Height

JD433A

See Configuration
Note:1, 9, 11

HP MSR50-60 Router

- 6 - FIC module slots
- Must select at least 1 Main Processing Unit
- Must select at least 1 Multi Service Module
- 1 - 350w AC Power Supply included
- 4U - Height

JF231A

See Configuration
Note:1, 9, 11

Configuration Rules:

Note 1 If this Switch is selected integrated to the CTO Switch Solution, Then a Minimum of 1 factory integrated accessory must be ordered and integrated to CTO chassis. See Menu below, option must have a #0D1 to be integrated to the CTO Chassis.

Note 9 Localization required. (See Localization Menu for list.)

Note 10 This HPN CTO switch cannot be factory racked. (Future Release)

Note 11 If the Router Chassis is to be Box Level Factory Integrated (CTO), Then the #0D1 is required on the Router Chassis and integrated to the JG500A - HP MSR CTO Enablement. (Min 1/Max 1 Router per SSP)

Internal Power Supplies

JD433A and JF285A Only System (std 1 // max 2) User Selection (min 0 // max 1) Per router

JF231A and JF640A Only System (std 1 // max 3) User Selection (min 0 // max 2) Per router

HP MSR50 AC Power Supply

JD650A

See Configuration
Note:1, 4, 9

HP MSR50-60 DC Power Supply

JF443A

See Configuration
Note:2, 4

HP MSR50 AC PoE Power Supply

JD652A

See Configuration
Note:3, 5, 9

Configuration

Configuration Rules:

- Note 1 If this Power Supply is selected, Then one of the following routers is required:
- | | |
|--------------------|--------|
| HP MSR50-40 Router | JD433A |
| HP MSR50-60 Router | JF231A |
- Note 2 If this Power Supply is selected, Then one of the following routers is required:
- | | |
|--|--------|
| HP MSR50-40 DC Router | JF285A |
| HP MSR50-60 Rtr Chassis w DC PwrSupply | JF640A |
- Note 3 Only 1 AC PoE Power Supply can be added ANY MSR 50.
- Note 4 Only 1 JD650A - HP MSR50 AC Power Supply or JF443A - HP MSR50-60 DC Power Supply can be added ANY MSR50.
- Note 5 If the JD429B - HP MSR50 G2 Processor Module is selected, Then this power supply is not supported.
- Note 9 Localization required. (See Localization Menu for list.)

Enter the following menu selections as integrated to the CTO Model X server above if order is factory built.

Modules

Main Processing Unit Slot

- HP MSR50 Processor Module JD653A
- 4 - SIC modules slot See Configuration
 - min=0 \ max=2 SFP Transceivers Note:1, 2, 4, 6, 8
 - 1 - 512MB HP MSR 512MB SDRAM Included
 - 1 - 256MB HP X600 256M Compact Flash Card Included
- Russian Reduced Encryption JD653A#A59
- HP MSR50 G2 Processor Module JD429B
- with no SIC modules slot See Configuration
 - min=0 \ max=3 SFP Transceiver Note:1,3, 4, 5, 8
 - 1 - 512MB HP MSR 512MB SDRAM Included
 - 1 - 256MB HP X600 256M Compact Flash Card Included
- Russian Reduced Encryption JD429B#A59

Configuration Rules:

- Note 1 The following Transceivers install into this Module: (Use #0D1 if router is CTO) - if



Configuration

applicable	
HP X120 1G SFP LC SX Transceiver	JD118B
HP X120 1G SFP LC LX Transceiver	JD119B
HP X125 1G SFP LC LH40 1310nm Transceiver	JD061A
HP X120 1G SFP LC LH40 1550nm Transceiver	JD062A
HP X125 1G SFP LC LH70 Transceiver	JD063B
HP X120 1G SFP LC LH100 Transceiver	JD103A
HP X120 1G SFP LC BX 10-U Transceiver	JD098B
HP X115 100M SFP LC FX Transceiver	JD102B
HP X110 100M SFP LC LH40 Transceiver	JD120B
HP X110 100M SFP LC LH80 Transceiver	JD091A
HP X110 100M SFP LC LH40 Transceiver	JD090A
HP X120 1G SFP LC BX 10-D Transceiver	JD099B

Note 2	The following DDR SDRAM install into this Module:	
	HP A-Series 256MB DDR SDRAM	JD647A
	HP A-Series 512MB DDR SDRAM	JD648A

Note 3	The following DDR SDRAM install into this Module:	
	HP A-Series 2GB DDR2 SDRAM	JG205A

Note 4	The following CF Card install into this Module:	
	HP A7500 1G Compact Flash Card	JC684A
	HP A7500 512M Compact Flash Card	JC685A
	HP A7500 256M Compact Flash Card	JC686A

Note 5	If this Module is selected, Then JD434A - HP MSR50 Router Software License is required.	
--------	---	--

Note 6	The following SIC Modules install into this Module: (Use #0D1 if router is CTO) - if applicable	
	HP MSR 4-port 10/100 SIC Module	JD573B
	HP MSR 9-port 10/100 DSIC Module	JD574B
	HP A-MSR 4-port 10/100Base-T PoE Switch SIC Module	JD620A
	HP A-MSR 9-port 10/100Base-T PoE Switch DSIC Module	JD621A
	HP MSR 1-port 10/100 SIC Module	JD545B
	HP 1-port 100Mbt SFP SIC Router Module	JF280A
	HP MSR 1-port 10/100/1000 SIC Module	JD572A
	HP MSR 2-port FXO SIC Module	JD558A
	HP MSR 1-port FXO SIC Module	JD559A
	HP MSR 2-port FXS SIC Module	JD560A
	HP MSR 1-port FXS SIC Module	JD561A
	HP MSR 1-port E1-Voice SIC Module	JD575A
	HP MSR 1-port T1-Voice SIC Module	JD576A
	HP 2p ISDN-S/T Voice Interface SIC Mod	JF821A
	HP MSR 2FXS + 1FXO Voice Intfc SIC Mod	JD632A
	HP MSR 1-port Fractional E1 SIC Module	JD634A

Configuration

HP MSR 1-port Fractional SIC Module	JD538A
HP MSR 2-port Fractional E1 SIC Module	JF842A
HP MSR 1-port Enhanced Serial SIC Mod	JD557A
HP A-MSR 1-port ADSL over POTS SIC Module	JD537A
HP MSR 1-port ISDN-S/T SIC Module	JD571A
HP A-MSR 8-port Async Serial SIC Module	JF281A
HP 802.11b/g/n Wireless AP SIC Module	JF819A
HP MSR 802.11b/g/n Wless AP SIC Mod (NA)	JG211A
HP MSR 1p 8-wire G.SHDSL (RJ45) DSIC Mod	JG191A
HP MSR 1-port ADSL over ISDN SIC Module	JG056B
HP MSR 16-port Async Serial SIC Module	JG186A
HP A-MSR 4-port FXS/1-port FXO DSIC Mod	JG189A
HP A-MSR HSPA/WCDMA SIC Module	JG187A

Note 8 If this product is ordered in Russia, Then the #A59 must be ordered with product number.

Multi-Service Module Slot

System (std 0 // max 1) User Selection (min 0 // max 1) per Router

HP MSR50 Module

- 2 - ESM Modules
- 1 - VCPM Module
- 4 - VPM Modules

JD651A
See Configuration
Note:1, 3, 4, 5

HP MSR50 G2 Module

- 2 - ESM Modules
- 1 - VCPM Module

JD430A
See Configuration
Note:2, 3, 4

Configuration Rules:

Note 1 If this module is selected, Then the JD653A - HP MSR50 Processor Module is required.

Note 2 If this module is selected, Then the JD429B - HP MSR50 G2 Processor Module is required.

Note 3 The following ESM Modules install into this Module: (Use #0D1 if router is CTO) --

HP A-MSR Advanced Network Data Encryption ESM Module	JD608A
HP A-MSR Standard Network Data Encryption ESM Module	JD609A

Note 4 The following VCPM Modules install into this Module: (Use #0D1 if router is CTO)

HP A-MSR Voice Co-processing Module	JD610A
-------------------------------------	--------

Configuration

Note 5	The following VPM Modules install into this Module: (Use #0D1 if router is CTO)	
	HP A-MSR 32-Channel Voice Processing Module	JD598A
	HP A-MSR 24-Channel Voice Processing Module	JD599A
	HP A-MSR 16-Channel Voice Processing Module	JD600A
	HP A-MSR 8-Channel Voice Processing Module	JD601A

FIC Modules

JD433A and JF285A Only System (std 0 // max 4) User Selection (min 0 // max 4) Per router

JF231A and JF640A Only System (std 0 // max 6) User Selection (min 0 // max 6) Per router

HP MSR 1-port 10/100/1000 FIC Module	JD583B
HP MSR 8p Async Serial RJ45 FIC Module <ul style="list-style-type: none">min=0 \ max=8 AUX Cables	JF260B See Configuration Note:6
HP MSR 16p Async Serial RJ45 FIC Mod <ul style="list-style-type: none">min=0 \ max=16 AUX Cables	JF265B See Configuration Note:6
HP MSR 2-port Gig-T FIC Module	JF269B
HP MSR 2-port 1000BASE-X FIC Module <ul style="list-style-type: none">min=0 \ max=2 SFP Modules	JF270B See Configuration Note:3
HP MSR 1-port GbE Fiber FIC Module <ul style="list-style-type: none">min=0 \ max=1 SFP Modules	JD582A See Configuration Note:3
HP MSR 2-port 10/100 FIC MSR Module	JD577A
HP 4-port 10/100 FIC Module	JF824A
HP MSR 16-port 10/100 PoE FIC Module <ul style="list-style-type: none">min=0 \ max=1 SFP Modules	JD616A See Configuration Note:3, 11, 19, 20
HP MSR 24-port 10/100 POE DFIC Module <ul style="list-style-type: none">min=0 \ max=2 SFP Modules	JD617A See Configuration Note:1, 2,3, 11, 19, 20
HP MSR 4-port E and M FIC Module	JD602A

Configuration

HP MSR 4-port FXO FIC Module	JD593A
HP MSR 4-port FXS FIC Module	JD594A
HP MSR 1-port T1 Voice FIC Module <ul style="list-style-type: none">• min=0 \ max=1 T1 Cable	JD605A
HP MSR 2-port T1 Voice FIC Module <ul style="list-style-type: none">• min=0 \ max=2 T1 Cable	JD606A
HP MSR 1-port E1 Voice FIC Module <ul style="list-style-type: none">• min=0 \ max=1 E1 Cable	JD607A See Configuration Note:8, 13
HP MSR 2-port E1-Voice FIC Module <ul style="list-style-type: none">• min=0 \ max=2 E1 Cable	JD587A See Configuration Note:8, 13
HP MSR 4-port Enhanced Serial FIC Module <ul style="list-style-type: none">• min=0 \ max=4 Serial Port Cable	JD584A See Configuration Note:7
HP MSR 8-port Serial Enhanced FIC Module <ul style="list-style-type: none">• min=0 \ max=8 Serial Port Cable	JD580A See Configuration Note:7
HP MSR 2-port CE1/PRI FIC Module <ul style="list-style-type: none">• min=0 \ max=2 E1 Cable	JD578A See Configuration Note:8, 13
HP MSR 4-port CE1/PRI FIC Module <ul style="list-style-type: none">• min=0 \ max=4 E1 Cable	JD588A See Configuration Note:8, 13
HP MSR 8-port CE1/PRI FIC-75 Module <ul style="list-style-type: none">• must select 1 8-port E1 Cable	JD585A See Configuration Note:9
HP MSR 4-port Fractional E1 FIC Module <ul style="list-style-type: none">• min=0 \ max=4 E1 Cable	JD591A See Configuration Note:8, 13
HP MSR 4-port Fractional T1 FIC Module <ul style="list-style-type: none">• min=0 \ max=4 T1 Cable	JD592A See Configuration Note:12

Configuration

HP MSR 1-port FT3/CT3 FIC Module <ul style="list-style-type: none">• min=0 \ max=2 E3/T3 Cable	JD629A See Configuration Note:11
HP MSR 1-port FE3/CE3 FIC Module <ul style="list-style-type: none">• min=0 \ max=2 E3/T3 Cable	JD625A See Configuration Note:11
HP MSR 4-port ISDN-S/T FIC Module	JD589A
HP MSR 4-port E1-IMA FIC -75 Module <ul style="list-style-type: none">• min=0 \ max=1 E1 Cable	JD622A See Configuration Note:14
HP MSR 1-port T3 ATM FIC Module <ul style="list-style-type: none">• min=0 \ max=2 E3/T3 Cable	JD595A See Configuration Note:11
HP MSR 1-port E3 ATM FIC Module <ul style="list-style-type: none">• min=0 \ max=2 E3/T3 Cable	JD596A See Configuration Note:11
HP MSR 1-port OC-3 ATM FIC Module <ul style="list-style-type: none">• min=0 \ max=1 SFP Modules	JD633A See Configuration Note:4
HP MSR 1-port OC-3 POS FIC Module <ul style="list-style-type: none">• min=0 \ max=1 SFP Modules	JD581C See Configuration Note:4
HP MSR 1p OC-3/STM-1 E1/T1 CPOS FIC Mod <ul style="list-style-type: none">• min=0 \ max=1 SFP Modules	JG201A See Configuration Note:4
HP A-MSR 8-p E1 IMA (75ohm) FIC Module <ul style="list-style-type: none">• min=1 \ max=1 8-port E1 Cable	JF278B See Configuration Note:15
HP A-MSR 24-port FXS FIC Module	JG197A
HP A-MSR 8-port T1/CT1/PRI FIC Module <ul style="list-style-type: none">• min=1 \ max=1 T1 Cable	JD586B See Configuration Note:17
HP A-MSR 8-port T1 IMA FIC Module	JG200A

Configuration

- min=1 \ max=1 T1 Cable

See Configuration Note:17

HP MSR OAP FIC Mod w/VMware vSphere

JG533A#B01

HP MSR LSB Com FIC Mod pwrby Msft Lync

JG589A#B01
See Configuration Note:21

Configuration Rules:

Note 1	If these Modules are add to the following routers Then Max = 2: HP MSR50-40 Router HP MSR50-40 DC Router	JD433A JF285A
Note 2	If these Modules are add to the following routers Then Max = 2: HP MSR50-60 Router HP MSR50-60 Rtr Chassis w DC PwrSupply	JF231A JF640A
Note 3	The following Transceivers install into this Module: (Use #0D1 if router is CTO) - if applicable HP X125 1G SFP LC LH70 Transceiver HP X120 1G SFP LC LH40 1550nm Transceiver HP X125 1G SFP LC LH40 1310nm Transceiver HP X120 1G SFP LC BX 10-U Transceiver HP X120 1G SFP LC BX 10-D Transceiver HP X120 1G SFP LC LH100 Transceiver HP X120 1G SFP LC SX Transceiver HP X120 1G SFP LC LX Transceiver	JD063B JD062A JD061A JD098B JD099B JD103A JD118B JD119B
Note 4	The following Transceivers install into this Module: (Use #0D1 if router is CTO) - if applicable HP X110 100M SFP LC LH40 Transceiver HP X110 100M SFP LC LH80 Transceiver HP X110 100M SFP LC FX Transceiver HP X110 100M SFP LC LX Transceiver	JD090A JD091A JD102B JD120B
Note 6	The following AUX Cables and Transit Cables install into this Module: Aux Cable-3m (D25 Male) Single Cable, Transit Plug, D25F, MP8(S)-? Single Cable, Transit Cable, 0.5m (RJ45)	JD508A JD636A JD641A
Note 7	The following Cables install into this Module: V.24 Serial Port Cable, DTE, 3m V.24 Serial Port Cable, DCE, 3m V.35 Serial Port Cable, DTE, 3m	JD519A JD521A JD523A

Configuration

V.35 Serial Port Cable, DCE, 3m	JD525A
X.21 Serial Port Cable, DTE, 3m	JD527A
X.21 Serial Port Cable, DCE, 3m	JD529A
RS449 Serial Port Cable, DTE, 3m	JF825A
RS449 Serial Port Cable, DCE, 3m	JF826A
RS530 Serial Port Cable, DTE, 3m	JF827A
RS530 Serial Port Cable, DCE, 3m	JF828A

Note 8	The following E1 Cables install into this Module: HP X260 E1 (2) BNC 75 ohm 3m Rtr Cable HP X260 E1 BNC 20m Router Cable HP X260 E1/2 BNC 75 ohm 40m Router Cable	JD175A JD514A JD516A
---------------	--	----------------------------

Note 9	The following Cable install into this Module: 8-port E1 Cable, 16 BNC, 3m, 75ohm	JD512A
---------------	---	--------

Note 11	The following E3/T3 Cable and Connector install into this Module: E3/T3 Cable 15m-BNC75 (ohm) Straight Male/SFYZ-75-2-1/SMB75 (ohm) Straight Female E3/T3 Cable 30m-BNC75 (ohm) Straight Male/SFYZ-75-2-1/SMB75 (ohm) Straight Female	JD531A JD533A
----------------	---	------------------

Note 12	The following T1 Cables install into this Module: HP X260 T1 Router Cable	JD518A
----------------	--	--------

Note 13	The following E1 Cables install into this Module: HP X260 E1 RJ45 3m Router Cable HP X260 E1 RJ45 20m Router Cable	JD509A JD517A
----------------	--	------------------

Note 14	The following E1 Cables install into this Module: HP X260 E1 4-Port IMA Router Cable	JD638A
----------------	---	--------

Note 15	The following 8E1 Cables install into this Module: HP CAB-75ohm 8E1-3m-BNC-IMA	JD927A
----------------	---	--------

Note 16	The following Cables install into this Module: HP A-MSR 50 pin D-sub Male to 24 x RJ-11 Plug 15m Router Cable	JG318A
----------------	--	--------

Note 17	The following Cables install into this Module: HP X260 8T1 RJ45 3m Router Cable	JD639A
----------------	--	--------

Note 19	If selected, Then show - Warning- JD652A - HP MSR50 AC PoE Power Supply required for POE.	
----------------	---	--

Note 20	If the JD429B - HP MSR50 G2 Processor Module is selected, Then this Module is not supported.	
----------------	--	--

Configuration

Note 21 Max of 2 Modules per router with 1 Power Supply, and Max of 4 Modules per router with 2 Power supplies.

SIC Modules

System (std 0 // max 4) User Selection (min 0 // max 4) per JD653A MPU

HP MSR 4-port 10/100 SIC Module	JD573B See Configuration Note:1
HP MSR 9-port 10/100 DSIC Module	JD574B See Configuration Note:1
HP A-MSR 4-port 10/100Base-T PoE Switch SIC Module	JD620A See Configuration Note:1
HP A-MSR 9-port 10/100Base-T PoE Switch DSIC Module	JD621A See Configuration Note:1
HP MSR 1-port 10/100 SIC Module	JD545B See Configuration Note:1
HP 1-port 100Mbt SFP SIC Router Module <ul style="list-style-type: none">min=0 \ max=1 SFP Transceivers	JF280A See Configuration Note:1, 2
HP MSR 1-port 10/100/1000 SIC Module <ul style="list-style-type: none">min=0 \ max=1 SFP Transceivers	JD572A See Configuration Note:1, 3
HP MSR 2-port FXO SIC Module	JD558A
HP MSR 1-port FXO SIC Module	JD559A
HP MSR 2-port FXS SIC Module	JD560A
HP MSR 1-port FXS SIC Module	JD561A

Configuration

HP MSR 1-port E1-Voice SIC Module <ul style="list-style-type: none">• min=0 \ max=1 E1 Cable	JD575A See Configuration Note:4, 13
HP MSR 1-port T1-Voice SIC Module <ul style="list-style-type: none">• min=0 \ max=1 T1 Cable	JD576A See Configuration Note: 10
HP 2p ISDN-S/T Voice Interface SIC Mod	JF821A
HP MSR 2FXS + 1FXO Voice Intfc SIC Mod	JD632A
HP MSR 1-port Fractional E1 SIC Module <ul style="list-style-type: none">• min=0 \ max=1 E1 Cable	JD634B See Configuration Note:4
HP MSR 1-port Fractional SIC Module <ul style="list-style-type: none">• min=0 \ max=1 T1 Cable	JD538A See Configuration Note: 10
HP MSR 2-port Fractional E1 SIC Module <ul style="list-style-type: none">• min=0 \ max=1 2E1 Cable	JF842A See Configuration Note:11
HP MSR 1-port Enhanced Serial SIC Mod <ul style="list-style-type: none">• min=0 \ max=1 Serial Port Cable	JD557A See Configuration Note:6
HP A-MSR 1-port ADSL over POTS SIC Module	JD537A See Configuration Note:1
HP MSR 1-port ISDN-S/T SIC Module	JD571A
HP A-MSR 8-port Async Serial SIC Module <ul style="list-style-type: none">• Must select 1 8AS Communication Cable (min=1 \ max=1 cable)	JF281A See Configuration Note:7
HP 802.11b/g/n Wireless AP SIC Module	JF819A See Configuration Note:1

Configuration

HP MSR 802.11b/g/n Wireless AP SIC Mod (NA)	JG211A See Configuration Note:1
HP MSR 1p 8-wire G.SHDSL (RJ45) DSIC Mod	JG191A See Configuration Note:1
HP MSR 1-port ADSL over ISDN SIC Module	JG056B See Configuration Note:1
HP MSR 16-port Async Serial SIC Module <ul style="list-style-type: none">Must select 4 HP X260 mini D-28/4-RJ45 0.3m Rtr Cables (min=4 \ max=4 cables)	JG186A See Configuration Note:12
HP A-MSR 4-port FXS/1-port FXO DSIC Mod	JG189A See Configuration Note:1
HP A-MSR HSPA/WCDMA SIC Module	JG187A See Configuration Note:1
HP MSR 1-port E1/CE1/PRI SIC Module	JF253B See Configuration Note:1

Configuration Rules:

Note 1	If these Modules are added, Then the Max = 2.	
Note 2	The following Transceivers install into this Module: (Use #0D1 if router is CTO) - if applicable	
	HP X110 100M SFP LC LH40 Transceiver	JD090A
	HP X110 100M SFP LC LH80 Transceiver	JD091A
	HP X110 100M SFP LC FX Transceiver	JD102B
	HP X110 100M SFP LC LX Transceiver	JD120B
Note 3	The following Transceivers install into this Module:	
	HP X125 1G SFP LC LH70 Transceiver	JD063B
	HP X120 1G SFP LC LH40 1550nm Transceiver	JD062A
	HP X125 1G SFP LC LH40 1310nm Transceiver	JD061A
	HP X120 1G SFP LC BX 10-U Transceiver	JD098B
	HP X120 1G SFP LC BX 10-D Transceiver	JD099B
	HP X120 1G SFP LC LH100 Transceiver	JD103A

Configuration

HP X120 1G SFP LC SX Transceiver	JD118B
HP X120 1G SFP LC LX Transceiver	JD119B

Note 4	The following E1 Cables install into this Module:	
	HP X260 E1 (2) BNC 75 ohm 3m Rtr Cable	JD175A
	HP X260 E1 BNC 20m Router Cable	JD514A
	HP X260 E1/2 BNC 75 ohm 40m Router Cable	JD516A

Note 6	The following Cables install into this Module:	
	V.24 Serial Port Cable, DTE, 3m	JD519A
	V.24 Serial Port Cable, DCE, 3m	JD521A
	V.35 Serial Port Cable, DTE, 3m	JD523A
	V.35 Serial Port Cable, DCE, 3m	JD525A
	X.21 Serial Port Cable, DTE, 3m	JD527A
	X.21 Serial Port Cable, DCE, 3m	JD529A
	RS449 Serial Port Cable, DTE, 3m	JF825A
	RS449 Serial Port Cable, DCE, 3m	JF826A
	RS530 Serial Port Cable, DTE, 3m	JF827A
	RS530 Serial Port Cable, DCE, 3m	JF828A

Note 7 If this module is selected Then 1 JD642A - HP X260 SIC-8AS RJ45 0.28m Router Cable is required.

Note 10	The following T1 Cables install into this Module:	
	HP X260 T1 Router Cable	JD518A

Note 11	The following 2E1 Cables install into this Module:	
	HP X260 2E1 BNC 3m Router Cable	JD643A

Note 12 If this module is selected Then 4 - JG263A HP X260 mini D-28/4-RJ45 0.3m Rtr Cable are required to be on the same order.

Note 13	The following E1 Cables install into this Module:	
	HP X260 E1 RJ45 3m Router Cable	JD509A
	HP X260 E1 RJ45 20m Router Cable	JD517A

ESM Modules

JD651A and JD430A Service Modules Only - System (std 0 // max 2) User Selection (min 0 // max 2)

HP MSR Encryption Accelerator Adv Mod	JD608A
HP MSR Std Encryption Accelerator Mod	JD609A

Voice Co-Processing Modules

JD651A and JD430A Service Modules Only -System (std 0 // max 1) User Selection (min 0 // max 1)



Configuration

HP MSR Voice Co-processor Module JD610A

Voice Processing Modules

[JD651A Service Modules Only -System \(std 0 // max 1\) User Selection \(min 0 // max 4\)](#)

[JD430A Service Modules Only -Not supported](#)

HP MSR 32-channel Voice Processor Module JD598A
HP MSR 24-channel Voice Processor Module JD599A
HP MSR 16-channel Voice Processor Module JD600A
HP MSR 8-channel Voice Processor Module JD601A

SDRAM

[System \(std 1 // max 2\) User Selection \(min 0 // max 2\) per Main Processing Module](#)

HP 2GB DDR2 SDRAM JG205A
HP MSR 256MB SDRAM JD647A
HP MSR 512MB SDRAM JD648A

Transceivers

SFP Transceivers

HP X115 100M SFP LC FX Transceiver JD102B
HP X110 100M SFP LC LH40 Transceiver JD120B
HP X110 100M SFP LC LH80 Transceiver JD091A
HP X120 1G SFP LC SX Transceiver JD118B
HP X120 1G SFP LC LX Transceiver JD119B
HP X120 1G SFP LC LH40 1550nm XCVR JD062A
HP X110 100M SFP LC LH40 Transceiver JD090A
HP X125 1G SFP LC LH40 1310nm XCVR JD061A
HP X125 1G SFP LC LH70 Transceiver JD063B
HP X120 1G SFP LC BX 10-D Transceiver JD099B
HP X120 1G SFP LC LH100 Transceiver JD103A
HP X120 1G SFP LC BX 10-U Transceiver JD098B

Cables

HP X260 mini D-28/4-RJ45 0.3m Rtr Cable JG263A
HP X200 V.24 DTE 3m Serial Port Cable JD519A
HP X200 V.24 DCE 3m Serial Port Cable JD521A
HP X200 V.35 DTE 3m Serial Port Cable JD523A



Configuration

HP X200 V.35 DCE 3m Serial Port Cable	JD525A
HP X200 X.21 DTE 3m Serial Port Cable	JD527A
HP X200 X.21 DCE 3m Serial Port Cable	JD529A
HP X260 RS449 3m DTE Serial Port Cable	JF825A
HP X260 RS449 3m DCE Serial Port Cable	JF826A
HP X260 RS530 3m DTE Serial Port Cable	JF827A
HP X260 RS530 3m DCE Serial Port Cable	JF828A
HP X260 Auxiliary Router Cable	JD508A
HP X260 E1 RJ45 3m Router Cable	JD509A
HP X260 E1 RJ45 20m Router Cable	JD517A
HP X260 E1 (2) BNC 75 ohm 3m Rtr Cable	JD175A
HP X260 E1 BNC 20m Router Cable	JD514A
HP X260 E1/2 BNC 75 ohm 40m Router Cable	JD516A
HP X260 E1 RJ45 BNC 75-120 ohm Conversion Router Cable	JD511A
HP X260 2E1 BNC 3m Router Cable	JD643A
HP X260 T1 Router Cable	JD518A
HP X260 T1 Voice Router Cable	JD535A
HP X260 T3/E3 Router Cable	JD531A
HP X260 E3-30 E3/T3 Router Cable	JD533A
HP X260 E1 4-port IMA Router Cable	JD638A
HP X260 8E1 BNC 75 ohm 3m Router Cable	JD512A
HP X260 SIC-8AS RJ45 0.28m Router Cable	JD642A
HP X200 Transit Plug D25F MP8(S) Single Cable	JD636A
HP X200 Transit Cable RJ45 0.5m Single Cable	JD641A
HP A-MSR 50 pin D-sub Male to 24 x RJ-11 Plug 15m Router Cable	JG318A

Remarks:

The following cable is used for RJ45 BNC Conversion
HP X260 E1 RJ45 BNC 75-120 ohm Conversion Router Cable JD511A

Router Options

Licenses

System (std 0 // max 1) User Selection (min 0 // max 1) per switch enclosure

HP MSR50 Router Software License	JD434A
----------------------------------	--------

SDRAM

System (std 1 // max 2) User Selection (min 0 // max 2) per Main Processing Module

HP A-Series 2GB DDR2 SDRAM	JG205A
	See Configuration Note:1



Configuration

HP MSR 256MB SDRAM

JD647A
[See Configuration Note:1](#)

HP MSR 512MB SDRAM

JD648A
[See Configuration Note:1](#)

Configuration Rules:

Note 1 These SDRAM's are supported on the following Modules only:
 HP MSR50 G2 Main Processing Unit JD429B
 HP MSR50 Main Processing Unit JD653A

Compact Flash cards

System (std 1 // max 2) User Selection (min 0 // max 1) per Main Processing Module

HP X600 1G Compact Flash Card

JC684A
[See Configuration Note:1](#)

HP X600 512M Compact Flash Card

JC685A
[See Configuration Note:1](#)

HP X600 256M Compact Flash Card

JC686A
[See Configuration Note:1](#)

Configuration Rules:

Note 1 These CF Cards are supported on the following Modules only:
 HP MSR50 G2 Main Processing Unit JD429B
 HP MSR50 Main Processing Unit JD653A

Technical Specifications

HP MSR50-40 Router (JD433A)

Ports	4 FIC slots												
Physical characteristics	<table border="0"> <tr> <td>Dimensions</td> <td>17.17(w) x 16.69(d) x 5.16(h) in (43.6 x 42.4 x 13.1 cm) (3U height)</td> </tr> <tr> <td>Weight</td> <td>39.68 lb (18 kg)</td> </tr> </table>	Dimensions	17.17(w) x 16.69(d) x 5.16(h) in (43.6 x 42.4 x 13.1 cm) (3U height)	Weight	39.68 lb (18 kg)								
Dimensions	17.17(w) x 16.69(d) x 5.16(h) in (43.6 x 42.4 x 13.1 cm) (3U height)												
Weight	39.68 lb (18 kg)												
Memory and processor	<table border="0"> <tr> <td>Processor 1</td> <td>RISC @ 1700 MHz, 1 GB DDR SDRAM, 256 MB compact flash</td> </tr> <tr> <td>Processor 2</td> <td>RISC @ 833 MHz, 512 MB DDR SDRAM, 256 MB compact flash</td> </tr> </table>	Processor 1	RISC @ 1700 MHz, 1 GB DDR SDRAM, 256 MB compact flash	Processor 2	RISC @ 833 MHz, 512 MB DDR SDRAM, 256 MB compact flash								
Processor 1	RISC @ 1700 MHz, 1 GB DDR SDRAM, 256 MB compact flash												
Processor 2	RISC @ 833 MHz, 512 MB DDR SDRAM, 256 MB compact flash												
Mounting	Mounts in an EIA standard 19-in. rack												
Performance	<table border="0"> <tr> <td>Throughput</td> <td>up to 1280 Kpps (64-byte packets)</td> </tr> <tr> <td>Routing/Switching capacity</td> <td>3 Gbps</td> </tr> <tr> <td>Routing table size</td> <td>100000 entries (IPv4), 100000 entries (IPv6)</td> </tr> </table>	Throughput	up to 1280 Kpps (64-byte packets)	Routing/Switching capacity	3 Gbps	Routing table size	100000 entries (IPv4), 100000 entries (IPv6)						
Throughput	up to 1280 Kpps (64-byte packets)												
Routing/Switching capacity	3 Gbps												
Routing table size	100000 entries (IPv4), 100000 entries (IPv6)												
Environment	<table border="0"> <tr> <td>Operating temperature</td> <td>32°F to 104°F (0°C to 40°C)</td> </tr> <tr> <td>Operating relative humidity</td> <td>5% to 90%, noncondensing</td> </tr> <tr> <td>Nonoperating/Storage temperature</td> <td>-40°F to 158°F (-40°C to 70°C)</td> </tr> <tr> <td>Nonoperating/Storage relative humidity</td> <td>5% to 90%, noncondensing</td> </tr> </table>	Operating temperature	32°F to 104°F (0°C to 40°C)	Operating relative humidity	5% to 90%, noncondensing	Nonoperating/Storage temperature	-40°F to 158°F (-40°C to 70°C)	Nonoperating/Storage relative humidity	5% to 90%, noncondensing				
Operating temperature	32°F to 104°F (0°C to 40°C)												
Operating relative humidity	5% to 90%, noncondensing												
Nonoperating/Storage temperature	-40°F to 158°F (-40°C to 70°C)												
Nonoperating/Storage relative humidity	5% to 90%, noncondensing												
Electrical characteristics	<table border="0"> <tr> <td>Maximum heat dissipation</td> <td>1194 BTU/hr (1259.67 kJ/hr)</td> </tr> <tr> <td>Voltage</td> <td>100-120/200-240 VAC</td> </tr> <tr> <td>Maximum power rating</td> <td>350 W</td> </tr> <tr> <td>PoE power</td> <td>500 W</td> </tr> <tr> <td>Frequency</td> <td>50/60 Hz</td> </tr> <tr> <td>Notes</td> <td> <p>Maximum power rating and maximum heat dissipation are the worst-case theoretical maximum numbers provided for planning the infrastructure with fully loaded PoE (if equipped), 100% traffic, all ports plugged in, and all modules populated.</p> <p>PoE power is the power supplied by the internal power supply. It is dependent on the type and quantity of power supplies and may be supplemented with the use of an external power supply (EPS).</p> </td> </tr> </table>	Maximum heat dissipation	1194 BTU/hr (1259.67 kJ/hr)	Voltage	100-120/200-240 VAC	Maximum power rating	350 W	PoE power	500 W	Frequency	50/60 Hz	Notes	<p>Maximum power rating and maximum heat dissipation are the worst-case theoretical maximum numbers provided for planning the infrastructure with fully loaded PoE (if equipped), 100% traffic, all ports plugged in, and all modules populated.</p> <p>PoE power is the power supplied by the internal power supply. It is dependent on the type and quantity of power supplies and may be supplemented with the use of an external power supply (EPS).</p>
Maximum heat dissipation	1194 BTU/hr (1259.67 kJ/hr)												
Voltage	100-120/200-240 VAC												
Maximum power rating	350 W												
PoE power	500 W												
Frequency	50/60 Hz												
Notes	<p>Maximum power rating and maximum heat dissipation are the worst-case theoretical maximum numbers provided for planning the infrastructure with fully loaded PoE (if equipped), 100% traffic, all ports plugged in, and all modules populated.</p> <p>PoE power is the power supplied by the internal power supply. It is dependent on the type and quantity of power supplies and may be supplemented with the use of an external power supply (EPS).</p>												
Safety	UL 60950-1; AS/NZS 60950; EN 60825-1 Safety of Laser Products-Part 1; EN 60825-2 Safety of Laser Products-Part 2; IEC 60950-1; EN 60950-1; CAN/CSA-C22.2 No. 60950-1-03; FDA 21 CFR Subchapter J												
Emissions	EN 55022 Class A ICES-003 Class A ANSI C63.4 2003 ETSI EN 300 386 V1.3.3 AS/NZS CISPR 22 Class A EN 61000-4-2 EN 61000-4-3 EN 61000-4-4 EN 61000-4-5 EN 61000-4-6												

Technical Specifications

EN 61000-3-2:2006
EN 61000-3-3:1995 +A1:2001+A2:2005
EMC Directive 2004/108/EC
FCC (CFR 47, Part 15) Class A
EN 55024:1998+ A1:2001 + A2:2003
EN 61000-4-11:2004
EN 61000-4-8:2001

Telecom

FCC part 68
CS-03

Management

IMC - Intelligent Management Center; command-line interface; Web browser; SNMP Manager; Telnet; RMON1; FTP; IEEE 802.3 Ethernet MIB

Notes

The HP 3G Wireless GSM/WCDMA WAN SIC Module (JF820A) is not approved for use in the same chassis as a Wi-Fi interface (IEEE 802.11b/g, 802.11b/g/n, etc.) in the European Union.

Services

3-year, parts only, global next-day advance exchange (UX166E)
3-year, 4-hour onsite, 13x5 coverage for hardware (UX167E)
3-year, 4-hour onsite, 24x7 coverage for hardware (UX170E)
3-year, 4-hour onsite, 24x7 coverage for hardware, 24x7 software phone support (UX173E)
3-year, 24x7 SW phone support, software updates (UX176E)
1-year, post-warranty, 4-hour onsite, 24x7 coverage for hardware, 24x7 software phone support (HR546E)
4-year, 4-hour onsite, 13x5 coverage for hardware (UX168E)
4-year, 4-hour onsite, 24x7 coverage for hardware (UX171E)
4-year, 4-hour onsite, 24x7 coverage for hardware, 24x7 software phone (UX174E)
4-year, 24x7 SW phone support, software updates (UX177E)
5-year, 4-hour onsite, 13x5 coverage for hardware (UX169E)
5-year, 4-hour onsite, 24x7 coverage for hardware (UX172E)
5-year, 4-hour onsite, 24x7 coverage for hardware, 24x7 software phone (UX175E)
5-year, 24x7 SW phone support, software updates (UX178E)
3 Yr 6 hr Call-to-Repair Onsite (UX179E)
4 Yr 6 hr Call-to-Repair Onsite (UX180E)
5 Yr 6 hr Call-to-Repair Onsite (UX181E)
1-year, 4-hour onsite, 13x5 coverage for hardware (HR544E)
1-year, 6 hour Call-To-Repair Onsite for hardware (HR548E)
1-year, 24x7 software phone support, software updates (HR547E)

Refer to the HP website at: www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.

HP MSR50-60 Router (JF231A)

Ports	6 FIC slots	
Physical characteristics	Dimensions	17.17(w) x 16.69(d) x 6.89(h) in (43.6 x 42.4 x 17.5 cm) (4U height)
	Weight	44.09 lb (20 kg)
Memory and processor	Processor 1	RISC @ 1700 MHz, 1 GB DDR SDRAM, 256 MB compact flash
	Processor 2	RISC @ 833 MHz, 512 MB DDR SDRAM, 256 MB compact flash
Mounting	Mounts in an EIA standard 19-in. rack	

Technical Specifications

Performance	Throughput	up to 1280 Kpps (64-byte packets)
	Routing/Switching capacity	3 Gbps
	Routing table size	100000 entries (IPv4), 100000 entries (IPv6)
Environment	Operating temperature	32°F to 104°F (0°C to 40°C)
	Operating relative humidity	5% to 90%, noncondensing
	Nonoperating/Storage temperature	-40°F to 158°F (-40°C to 70°C)
	Nonoperating/Storage relative humidity	5% to 90%, noncondensing
Electrical characteristics	Maximum heat dissipation	1194 BTU/hr (1259.67 kJ/hr)
	Voltage	100-120/200-240 VAC
	Maximum power rating	350 W
	PoE power	500 W
	Frequency	50/60 Hz
	Notes	Maximum power rating and maximum heat dissipation are the worst-case theoretical maximum numbers provided for planning the infrastructure with fully loaded PoE (if equipped), 100% traffic, all ports plugged in, and all modules populated. PoE power is the power supplied by the internal power supply. It is dependent on the type and quantity of power supplies and may be supplemented with the use of an external power supply (EPS).
	Safety	UL 60950-1; AS/NZS 60950; EN 60825-1 Safety of Laser Products-Part 1; EN 60825-2 Safety of Laser Products-Part 2; IEC 60950-1; EN 60950-1; CAN/CSA-C22.2 No. 60950-1-03; FDA 21 CFR Subchapter J
Emissions	EN 55022 Class A ICES-003 Class A ANSI C63.4 2003 ETSI EN 300 386 V1.3.3 AS/NZS CISPR 22 Class A EN 61000-4-2 EN 61000-4-3 EN 61000-4-4 EN 61000-4-5 EN 61000-4-6 EN 61000-3-2:2006 EN 61000-3-3:1995 +A1:2001+A2:2005 EMC Directive 2004/108/EC FCC (CFR 47, Part 15) Class A EN 55024:1998+ A1:2001 + A2:2003 EN 61000-4-11:2004 EN 61000-4-8:2001	
Telecom	FCC part 68 CS-03	

Technical Specifications

Management	IMC - Intelligent Management Center; command-line interface; Web browser; SNMP Manager; Telnet; RMON1; FTP; IEEE 802.3 Ethernet MIB
Notes	The HP 3G Wireless GSM/WCDMA WAN SIC Module (JF820A) is not approved for use in the same chassis as a Wi-Fi interface (IEEE 802.11b/g, 802.11b/g/n, etc.) in the European Union.
Services	<p>3-year, parts only, global next-day advance exchange (UX166E)</p> <p>3-year, 4-hour onsite, 13x5 coverage for hardware (UX167E)</p> <p>3-year, 4-hour onsite, 24x7 coverage for hardware (UX170E)</p> <p>3-year, 4-hour onsite, 24x7 coverage for hardware, 24x7 software phone support (UX173E)</p> <p>3-year, 24x7 SW phone support, software updates (UX176E)</p> <p>1-year, post-warranty, 4-hour onsite, 24x7 coverage for hardware, 24x7 software phone support (HR546E)</p> <p>4-year, 4-hour onsite, 13x5 coverage for hardware (UX168E)</p> <p>4-year, 4-hour onsite, 24x7 coverage for hardware (UX171E)</p> <p>4-year, 4-hour onsite, 24x7 coverage for hardware, 24x7 software phone (UX174E)</p> <p>4-year, 24x7 SW phone support, software updates (UX177E)</p> <p>5-year, 4-hour onsite, 13x5 coverage for hardware (UX169E)</p> <p>5-year, 4-hour onsite, 24x7 coverage for hardware (UX172E)</p> <p>5-year, 4-hour onsite, 24x7 coverage for hardware, 24x7 software phone (UX175E)</p> <p>5-year, 24x7 SW phone support, software updates (UX178E)</p> <p>3 Yr 6 hr Call-to-Repair Onsite (UX179E)</p> <p>4 Yr 6 hr Call-to-Repair Onsite (UX180E)</p> <p>5 Yr 6 hr Call-to-Repair Onsite (UX181E)</p> <p>1-year, 4-hour onsite, 13x5 coverage for hardware (HR544E)</p> <p>1-year, 6 hour Call-To-Repair Onsite for hardware (HR548E)</p> <p>1-year, 24x7 software phone support, software updates (HR547E)</p>

Refer to the HP website at: www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.

HP MSR50-40 DC Router (JF285A)

Ports	4 FIC slots	
Physical characteristics	Dimensions	17.17(w) x 16.69(d) x 5.16(h) in (43.6 x 42.4 x 13.1 cm) (3U height)
	Weight	39.68 lb (18 kg)
Memory and processor	Processor 1	RISC @ 1700 MHz, 1 GB DDR SDRAM, 256 MB compact flash
	Processor 2	RISC @ 833 MHz, 512 MB DDR SDRAM, 256 MB compact flash
Mounting	Mounts in an EIA standard 19-in. rack	
Performance	Throughput	up to 1280 Kpps (64-byte packets)
	Routing/Switching capacity	3 Gbps
	Routing table size	100000 entries (IPv4), 100000 entries (IPv6)
Environment	Operating temperature	32°F to 104°F (0°C to 40°C)
	Operating relative humidity	5% to 90%, noncondensing

Technical Specifications

	Nonoperating/Storage temperature	-40°F to 158°F (-40°C to 70°C)
	Nonoperating/Storage relative humidity	5% to 90%, noncondensing
Electrical characteristics	Maximum heat dissipation	1194 BTU/hr (1259.67 kJ/hr)
	DC Voltage	-48 VDC to -60 VDC
	Maximum power rating	350 W
	PoE power	500 W
	Notes	<p>Maximum power rating and maximum heat dissipation are the worst-case theoretical maximum numbers provided for planning the infrastructure with fully loaded PoE (if equipped), 100% traffic, all ports plugged in, and all modules populated.</p> <p>PoE power is the power supplied by the internal power supply. It is dependent on the type and quantity of power supplies and may be supplemented with the use of an external power supply (EPS).</p>
Safety	UL 60950-1; AS/NZS 60950; EN 60825-1 Safety of Laser Products-Part 1; EN 60825-2 Safety of Laser Products-Part 2; IEC 60950-1; EN 60950-1; CAN/CSA-C22.2 No. 60950-1-03; FDA 21 CFR Subchapter J	
Emissions	EN 55022 Class A ICES-003 Class A ANSI C63.4 2003 ETSI EN 300 386 V1.3.3 AS/NZS CISPR 22 Class A EN 61000-4-2 EN 61000-4-3 EN 61000-4-4 EN 61000-4-5 EN 61000-4-6 EN 61000-3-2:2006 EN 61000-3-3:1995 +A1:2001+A2:2005 EMC Directive 2004/108/EC FCC (CFR 47, Part 15) Class A EN 55024:1998+ A1:2001 + A2:2003 EN 61000-4-11:2004 EN 61000-4-8:2001	
Telecom	FCC part 68 CS-03	
Management	IMC - Intelligent Management Center; command-line interface; Web browser; SNMP Manager; Telnet; RMON1; FTP; IEEE 802.3 Ethernet MIB	
Notes	The HP 3G Wireless GSM/WCDMA WAN SIC Module (JF820A) is not approved for use in the same chassis as a Wi-Fi interface (IEEE 802.11b/g, 802.11b/g/n, etc.) in the European Union.	
Services	3-year, parts only, global next-day advance exchange (UX166E) 3-year, 4-hour onsite, 13x5 coverage for hardware (UX167E) 3-year, 4-hour onsite, 24x7 coverage for hardware (UX170E) 3-year, 4-hour onsite, 24x7 coverage for hardware, 24x7 software phone support (UX173E) 3-year, 24x7 SW phone support, software updates (UX176E) 1-year, post-warranty, 4-hour onsite, 24x7 coverage for hardware, 24x7 software phone support	

Technical Specifications

- (HR546E)
- 4-year, 4-hour onsite, 13x5 coverage for hardware (UX168E)
- 4-year, 4-hour onsite, 24x7 coverage for hardware (UX171E)
- 4-year, 4-hour onsite, 24x7 coverage for hardware, 24x7 software phone (UX174E)
- 4-year, 24x7 SW phone support, software updates (UX177E)
- 5-year, 4-hour onsite, 13x5 coverage for hardware (UX169E)
- 5-year, 4-hour onsite, 24x7 coverage for hardware (UX172E)
- 5-year, 4-hour onsite, 24x7 coverage for hardware, 24x7 software phone (UX175E)
- 5-year, 24x7 SW phone support, software updates (UX178E)
- 3 Yr 6 hr Call-to-Repair Onsite (UX179E)
- 4 Yr 6 hr Call-to-Repair Onsite (UX180E)
- 5 Yr 6 hr Call-to-Repair Onsite (UX181E)
- 1-year, 4-hour onsite, 13x5 coverage for hardware (HR544E)
- 1-year, 6 hour Call-To-Repair Onsite for hardware (HR548E)
- 1-year, 24x7 software phone support, software updates (HR547E)

Refer to the HP website at: www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.

HP MSR50-60 DC Router (JF640A)

Ports	6 FIC slots	
Physical characteristics	Dimensions	17.17(w) x 16.69(d) x 6.89(h) in (43.6 x 42.4 x 17.5 cm) (4U height)
	Weight	44.09 lb (20 kg)
Memory and processor	Processor 1	RISC @ 1700 MHz, 1 GB DDR SDRAM, 256 MB compact flash
	Processor 2	RISC @ 833 MHz, 512 MB DDR SDRAM, 256 MB compact flash
Mounting	Mounts in an EIA-standard 19 in. rack	
Performance	Throughput	up to 1280 Kpps (64-byte packets)
	Routing/Switching capacity	3 Gbps
	Routing table size	100000 entries (IPv4), 100000 entries (IPv6)
Environment	Operating temperature	32°F to 104°F (0°C to 40°C)
	Operating relative humidity	5% to 90%, noncondensing
	Nonoperating/Storage temperature	-40°F to 158°F (-40°C to 70°C)
Electrical characteristics	Nonoperating/Storage relative humidity	5% to 90%, noncondensing
	Maximum heat dissipation	1194 BTU/hr (1259.67 kJ/hr)
	DC Voltage	-48 VDC to -60 VDC
	Maximum power rating	350 W
	PoE power	500 W
	Notes	Maximum power rating and maximum heat dissipation are the worst-case

Technical Specifications

theoretical maximum numbers provided for planning the infrastructure with fully loaded PoE (if equipped), 100% traffic, all ports plugged in, and all modules populated.

PoE Power is the power supplied by the internal power supply, it is dependent on the type and quantity of power supplies and may be supplemented with the use of a External Power Supply (EPS).

Safety	UL 60950-1; AS/NZS 60950; EN 60825-1 Safety of Laser Products-Part 1; EN 60825-2 Safety of Laser Products-Part 2; IEC 60950-1; EN 60950-1; CAN/CSA-C22.2 No. 60950-1-03; FDA 21 CFR Subchapter J	
Emissions	EN 55022 Class A ICES-003 Class A ANSI C63.4 2003 ETSI EN 300 386 V1.3.3 AS/NZS CISPR 22 Class A EN 61000-4-2 EN 61000-4-3 EN 61000-4-4 EN 61000-4-5 EN 61000-4-6 EN 61000-3-2:2006 EN 61000-3-3:1995 +A1:2001+A2:2005 EMC Directive 2004/108/EC FCC (CFR 47, Part 15) Class A EN 55024:1998+ A1:2001 + A2:2003 EN 61000-4-11:2004 EN 61000-4-8:2001	
Telecom	FCC part 68 CS-03	
Management	IMC - Intelligent Management Center; command-line interface; Web browser; SNMP Manager; Telnet; RMON1; FTP; IEEE 802.3 Ethernet MIB	
Notes	The HP 3G Wireless GSM/WCDMA WAN SIC Module (JF820A) is not approved for use in the same chassis as a Wi-Fi interface (IEEE 802.11b/g, 802.11b/g/n, etc.) in the European Union.	
Services	Refer to the HP website at: www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.	
Standards and protocols (applies to all products in series)	BGP RFC 1163 Border Gateway Protocol (BGP) RFC 1267 Border Gateway Protocol 3 (BGP-3) RFC 1657 Definitions of Managed Objects for BGPv4 RFC 1771 BGPv4 RFC 1772 Application of the BGP RFC 1773 Experience with the BGP-4 Protocol RFC 1774 BGP-4 Protocol Analysis RFC 1965 BGP4 confederations RFC 1997 BGP Communities Attribute RFC 1998 PPP Gandalf FZA Compression Protocol RFC 2385 BGP Session Protection via TCP MD5 RFC 2439 BGP Route Flap Damping	RFC 3215 LDP State Machine RFC 3246 Expedited Forwarding PHB RFC 3268 Advanced Encryption Standard (AES) Ciphersuites for Transport Layer Security (TLS) RFC 3277 IS-IS Transient Blackhole Avoidance RFC 3279 Algorithms and Identifiers for the Internet X.509 Public Key Infrastructure Certificate and Certificate Revocation List (CRL) Profile RFC 3280 Internet X.509 Public Key Infrastructure Certificate and Certificate Revocation List (CRL) Profile RFC 3392 Support BGP capabilities advertisement RFC 3479 Fault Tolerance for the Label Distribution Protocol (LDP) RFC 3564 Requirements for Support of

Technical Specifications

Device management

RFC 1305 NTPv3
RFC 1945 Hypertext Transfer Protocol -- HTTP/1.0
RFC 2271 FrameWork
RFC 2452 MIB for TCP6
RFC 2454 MIB for UDP6

General protocols

IEEE 802.1D MAC Bridges
IEEE 802.1p Priority
IEEE 802.1Q VLANs
IEEE 802.1s Multiple Spanning Trees
IEEE 802.1w Rapid Reconfiguration of Spanning Tree
RFC 768 UDP
RFC 783 TFTP Protocol (revision 2)
RFC 791 IP
RFC 792 ICMP
RFC 793 TCP
RFC 826 ARP
RFC 854 TELNET
RFC 855 Telnet Option Specification
RFC 856 TELNET
RFC 858 Telnet Suppress Go Ahead Option
RFC 894 IP over Ethernet
RFC 925 Multi-LAN Address Resolution
RFC 950 Internet Standard Subnetting Procedure
RFC 959 File Transfer Protocol (FTP)
RFC 1006 ISO transport services on top of the TCP: Version 3
RFC 1027 Proxy ARP
RFC 1034 Domain Concepts and Facilities
RFC 1035 Domain Implementation and Specification
RFC 1042 IP Datagrams
RFC 1058 RIPv1
RFC 1071 Computing the Internet Checksum
RFC 1091 Telnet Terminal-Type Option
RFC 1122 Host Requirements
RFC 1141 Incremental updating of the Internet checksum
RFC 1142 OSI IS-IS Intra-domain Routing Protocol
RFC 1144 Compressing TCP/IP headers for low-speed serial links
RFC 1195 OSI ISIS for IP and Dual Environments
RFC 1256 ICMP Router Discovery Protocol (IRDP)
RFC 1293 Inverse Address Resolution Protocol
RFC 1315 Management Information Base for Frame Relay DTEs
RFC 1332 The PPP Internet Protocol Control Protocol (IPCP)
RFC 1333 PPP Link Quality Monitoring
RFC 1334 PPP Authentication Protocols (PAP)

Differentiated Services-aware MPLS Traffic Engineering
RFC 3602 The AES-CBC Cipher Algorithm and Its Use with IPsec
RFC 3706 A Traffic-Based Method of Detecting Dead Internet Key Exchange (IKE) Peers
RFC 3784 ISIS TE support
RFC 3786 Extending the Number of IS-IS LSP Fragments Beyond the 256 Limit
RFC 3811 Definitions of Textual Conventions (TCs) for Multiprotocol Label Switching (MPLS) Management
RFC 3812 Multiprotocol Label Switching (MPLS) Traffic Engineering (TE) Management Information Base (MIB)
RFC 3847 Restart signaling for IS-IS
FRF.1.2 PVC User-to-Network Interface (UNI) Implementation Agreement - July 2000
FRF.11.1 Voice over Frame Relay Implementation Agreement - May 1997 - Annex J added March 1999
FRF.12 Frame Relay Fragmentation Implementation Agreement - December 1997
FRF.16.1 Multilink Frame Relay UNI/NNI Implementation Agreement - May 2002
FRF.2.2 Frame Relay Network-to-Network Interface (NNI) Implementation Agreement - March 2002
FRF.20 Frame Relay IP Header Compression Implementation Agreement - June 2001
FRF.3.2 Frame Relay Multiprotocol Encapsulation Implementation Agreement - April 2000
FRF.7 Frame Relay PVC Multicast Service and Protocol Description - October 1994
FRF.9 Data Compression Over Frame Relay Implementation Agreement - January 1996

IP multicast

RFC 1112 IGMP
RFC 2236 IGMPv2
RFC 2283 Multiprotocol Extensions for BGP-4
RFC 2362 PIM Sparse Mode
RFC 2934 Protocol Independent Multicast MIB for IPv4
RFC 3376 IGMPv3

IPv6

RFC 1981 IPv6 Path MTU Discovery
RFC 2080 RIPng for IPv6
RFC 2292 Advanced Sockets API for IPv6
RFC 2373 IPv6 Addressing Architecture
RFC 2460 IPv6 Specification
RFC 2461 IPv6 Neighbor Discovery

Technical Specifications

- RFC 1349 Type of Service
 - RFC 1350 TFTP Protocol (revision 2)
 - RFC 1377 The PPP OSI Network Layer Control Protocol (OSINLCP)
 - RFC 1381 SNMP MIB Extension for X.25 LAPB
 - RFC 1471 The Definitions of Managed Objects for the Link Control Protocol of the Point-to-Point Protocol
 - RFC 1472 The Definitions of Managed Objects for the Security Protocols of the Point-to-Point Protocol
 - RFC 1490 Multiprotocol Interconnect over Frame Relay
 - RFC 1519 CIDR
 - RFC 1534 DHCP/BOOTP Interoperation
 - RFC 1542 Clarifications and Extensions for the Bootstrap Protocol
 - RFC 1552 The PPP Internetworking Packet Exchange Control Protocol (IPXCP)
 - RFC 1577 Classical IP and ARP over ATM
 - RFC 1613 Cisco Systems X.25 over TCP (XOT)
 - RFC 1624 Incremental Internet Checksum
 - RFC 1631 NAT
 - RFC 1638 PPP Bridging Control Protocol (BCP)
 - RFC 1661 The Point-to-Point Protocol (PPP)
 - RFC 1662 PPP in HDLC-like Framing
 - RFC 1695 Definitions of Managed Objects for ATM Management Version 8.0 using SMIv2
 - RFC 1701 Generic Routing Encapsulation
 - RFC 1702 Generic Routing Encapsulation over IPv4 networks
 - RFC 1721 RIP-2 Analysis
 - RFC 1722 RIP-2 Applicability
 - RFC 1723 RIP v2
 - RFC 1795 Data Link Switching: Switch-to-Switch Protocol AIW DLSw RIG: DLSw Closed Pages, DLSw Standard Version 1
 - RFC 1812 IPv4 Routing
 - RFC 1829 The ESP DES-CBC Transform
 - RFC 1877 PPP Internet Protocol Control Protocol Extensions for Name Server Addresses
 - RFC 1944 Benchmarking Methodology for Network Interconnect Devices
 - RFC 1973 PPP in Frame Relay
 - RFC 1974 PPP Stac LZS Compression Protocol
 - RFC 1990 The PPP Multilink Protocol (MP)
 - RFC 1994 PPP Challenge Handshake Authentication Protocol (CHAP)
 - RFC 2091 Trigger RIP
 - RFC 2131 DHCP
 - RFC 2132 DHCP Options and BOOTP Vendor Extensions
 - RFC 2166 APPN Implementer's Workshop Closed
 - RFC 2462 IPv6 Stateless Address Auto-configuration
 - RFC 2464 Transmission of IPv6 over Ethernet Networks
 - RFC 2472 IP Version 6 over PPP
 - RFC 2473 Generic Packet Tunneling in IPv6
 - RFC 2529 Transmission of IPv6 Packets over IPv4
 - RFC 2545 Use of MP-BGP-4 for IPv6
 - RFC 2553 Basic Socket Interface Extensions for IPv6
 - RFC 2740 OSPFv3 for IPv6
 - RFC 2893 Transition Mechanisms for IPv6 Hosts and Routers
 - RFC 3056 Connection of IPv6 Domains via IPv4 Clouds
 - RFC 3513 IPv6 Addressing Architecture
 - RFC 3596 DNS Extension for IPv6
- MIBs**
- RFC 1213 MIB II
 - RFC 1229 Interface MIB Extensions
 - RFC 1286 Bridge MIB
 - RFC 1493 Bridge MIB
 - RFC 1573 SNMP MIB II
 - RFC 1724 RIPv2 MIB
 - RFC 1757 Remote Network Monitoring MIB
 - RFC 1850 OSPFv2 MIB
 - RFC 2011 SNMPv2 MIB for IP
 - RFC 2012 SNMPv2 MIB for TCP
 - RFC 2013 SNMPv2 MIB for UDP
 - RFC 2233 Interfaces MIB
 - RFC 2454 IPV6-UDP-MIB
 - RFC 2465 IPv6 MIB
 - RFC 2466 ICMPv6 MIB
 - RFC 2618 RADIUS Client MIB
 - RFC 2620 RADIUS Accounting MIB
 - RFC 2674 802.1p and IEEE 802.1Q Bridge MIB
 - RFC 2737 Entity MIB (Version 2)
 - RFC 2863 The Interfaces Group MIB
 - RFC 2933 IGMP MIB
 - RFC 3813 MPLS LSR MIB
- Network management**
- IEEE 802.1D (STP)
 - RFC 1155 Structure of Management Information
 - RFC 1157 SNMPv1
 - RFC 1905 SNMPv2 Protocol Operations
 - RFC 2272 SNMPv3 Management Protocol
 - RFC 2273 SNMPv3 Applications
 - RFC 2274 USM for SNMPv3
 - RFC 2275 VACM for SNMPv3
 - RFC 2575 SNMPv3 View-based Access Control

Technical Specifications

Pages Document DLSw v2.0 Enhancements
RFC 2205 Resource ReSerVation Protocol (RSVP) -
Version 1 Functional Specification
RFC 2280 Routing Policy Specification Language
(RPSL)
RFC 2284 EAP over LAN
RFC 2338 VRRP
RFC 2364 PPP Over AAL5
RFC 2374 An Aggregatable Global Unicast Address
Format
RFC 2451 The ESP CBC-Mode Cipher Algorithms
RFC 2453 RIPv2
RFC 2510 Internet X.509 Public Key Infrastructure
Certificate Management Protocols
RFC 2511 Internet X.509 Certificate Request
Message Format
RFC 2516 A Method for Transmitting PPP Over
Ethernet (PPPoE)
RFC 2644 Directed Broadcast Control
RFC 2661 L2TP
RFC 2663 NAT Terminology and Considerations
RFC 2684 Multiprotocol Encapsulation over ATM
Adaptation Layer 5
RFC 2694 DNS extensions to Network Address
Translators (DNS_ALG)
RFC 2702 Requirements for Traffic Engineering Over
MPLS
RFC 2747 RSVP Cryptographic Authentication
RFC 2763 Dynamic Name-to-System ID mapping
support
RFC 2765 Stateless IP/ICMP Translation Algorithm
(SIIT)
RFC 2766 Network Address Translation - Protocol
Translation (NAT-PT)
RFC 2784 Generic Routing Encapsulation (GRE)
RFC 2787 Definitions of Managed Objects for VRRP
RFC 2961 RSVP Refresh Overhead Reduction
Extensions
RFC 2966 Domain-wide Prefix Distribution with Two-
Level IS-IS
RFC 2973 IS-IS Mesh Groups
RFC 2993 Architectural Implications of NAT
RFC 3022 Traditional IP Network Address Translator
(Traditional NAT)
RFC 3027 Protocol Complications with the IP
Network Address Translator
RFC 3031 Multiprotocol Label Switching Architecture
RFC 3032 MPLS Label Stack Encoding
RFC 3036 LDP Specification
RFC 3046 DHCP Relay Agent Information Option
RFC 3063 MPLS Loop Prevention Mechanism

RFC 3164 BSD syslog Protocol

OSPF

RFC 1245 OSPF protocol analysis
RFC 1246 Experience with OSPF
RFC 1587 OSPF NSSA
RFC 1765 OSPF Database Overflow
RFC 1850 OSPFv2 Management Information Base
(MIB), traps
RFC 2328 OSPFv2
RFC 2370 OSPF Opaque LSA Option
RFC 3101 OSPF NSSA

QoS/CoS

IEEE 802.1P (CoS)
RFC 2474 DS Field in the IPv4 and IPv6 Headers
RFC 2475 DiffServ Architecture
RFC 2597 DiffServ Assured Forwarding (AF)
RFC 2598 DiffServ Expedited Forwarding (EF)
RFC 3168 The Addition of Explicit Congestion
Notification (ECN) to IP

Security

IEEE 802.1X Port Based Network Access Control
RFC 1321 The MD5 Message-Digest Algorithm
RFC 2082 RIP-2 MD5 Authentication
RFC 2104 Keyed-Hashing for Message
Authentication
RFC 2138 RADIUS Authentication
RFC 2209 RSVP-Message Processing
RFC 2246 Transport Layer Security (TLS)
RFC 2716 PPP EAP TLS Authentication Protocol
RFC 2865 RADIUS Authentication
RFC 2866 RADIUS Accounting
RFC 3567 Intermediate System (IS) to IS
Cryptographic Authentication

VPN

RFC 2403 - HMAC-MD5-96
RFC 2404 - HMAC-SHA1-96
RFC 2405 - DES-CBC Cipher algorithm
RFC 2547 BGP/MPLS VPNs
RFC 2796 BGP Route Reflection - An Alternative to
Full Mesh IBGP
RFC 2842 Capabilities Advertisement with BGP-4
RFC 2858 Multiprotocol Extensions for BGP-4
RFC 2918 Route Refresh Capability for BGP-4
RFC 3107 Carrying Label Information in BGP-4

IPsec

Technical Specifications

- RFC 3065 Support AS confederation
- RFC 3137 OSPF Stub Router Advertisement
- RFC 3209 RSVP-TE Extensions to RSVP for LSP Tunnels
- RFC 3210 Applicability Statement for Extensions to RSVP for LSP-Tunnels
- RFC 3212 Constraint-Based LSP setup using LDP (CR-LDP)
- RFC 3214 LSP Modification Using CR-LDP
- RFC 1028 IP Authentication using Keyed MD5
- RFC 2401 IP Security Architecture
- RFC 2402 IP Authentication Header
- RFC 2406 IP Encapsulating Security Payload
- RFC 2407 - Domain of interpretation
- RFC 2410 - The NULL Encryption Algorithm and its use with IPsec
- RFC 2411 IP Security Document Roadmap
- RFC 2412 - OAKLEY
- RFC 2865 - Remote Authentication Dial In User Service (RADIUS)

Accessories

HP MSR50 Series accessories

Transceivers

HP X110 100M SFP LC FX Transceiver	JD102B
HP X110 100M SFP LC LX Transceiver	JD120B
HP X110 100M SFP LC LH40 Transceiver	JD090A
HP X110 100M SFP LC LH80 Transceiver	JD091A
HP X120 1G SFP LC SX Transceiver	JD118B
HP X120 1G SFP LC LX Transceiver	JD119B
HP X124 1G SFP LC LH40 1310nm Transceiver	JD061A
HP X120 1G SFP LC LH40 1550nm Transceiver	JD062A
HP X125 1G SFP LC LH70 Transceiver	JD063B
HP X120 1G SFP LC LH100 Transceiver	JD103A
HP X120 1G SFP LC BX 10-U Transceiver	JD098B
HP X120 1G SFP LC BX 10-D Transceiver	JD099B

Cables

HP X200 V.24 DTE 3m Serial Port Cable	JD519A
HP X200 V.24 DCE 3m Serial Port Cable	JD521A
HP X200 V.35 DTE 3m Serial Port Cable	JD523A
HP X200 V.35 DCE 3m Serial Port Cable	JD525A
HP X200 X.21 DTE 3m Serial Port Cable	JD527A
HP X200 X.21 DCE 3m Serial Port Cable	JD529A
HP X260 RS449 3m DTE Serial Port Cable	JF825A
HP X260 RS449 3m DCE Serial Port Cable	JF826A
HP X260 RS530 3m DTE Serial Port Cable	JF827A
HP X260 RS530 3m DCE Serial Port Cable	JF828A
HP X260 Auxiliary Router Cable	JD508A
HP X260 E1 RJ45 3m Router Cable	JD509A
HP X260 E1 RJ45 20m Router Cable	JD517A
HP X260 E1 BNC 75 ohm 3m Router Cable	JD175A
HP X260 E1 BNC 20m Router Cable	JD514A
HP X260 E1 BNC 75 ohm 40m Router Cable	JD516A
HP X260 E1 RJ45 BNC 75-120 ohm Conversion Router Cable	JD511A
HP X260 2E1 BNC 3m Router Cable	JD643A
HP X260 T1 Router Cable	JD518A
HP X260 T1 Voice Router Cable	JD535A
HP X260 T3/E3 Router Cable	JD531A
HP X260 E3-30 E3/T3 Router Cable	JD533A
HP X260 E1 4-port IMA Router Cable	JD638A
HP X260 8E1 BNC 75 ohm 3m Router Cable	JD512A
HP X260 SIC-8AS RJ45 0.28m Router Cable	JD642A
HP X200 Transit Plug D25F MP8(S) Single Cable	JD636A
HP X200 Transit Cable RJ45 0.5m Single Cable	JD641A
HP X260 mini D-28 to 4-RJ45 0.3m Router Cable	JG263A
HP MSR 50 pin D-sub Male to 24 x RJ-11 Plug 15m Router Cable	JG318A
HP CAB-75ohm 8E1-3m-BNC-IMA	JD927A

Accessories

HP X260 8T1 RJ45 3m Router Cable	JD639A
Power Supply	
HP MSR50 350W AC Power Supply	JD650A
HP MSR50 350W DC Power Supply	JF443A
HP MSR50 500W PoE Power Module	JD652A
License	
HP MSR50 Series Standard Version Router Software License	JD434A
Router Modules	
HP MSR50 G2 Main Processing Unit	JD429B
HP MSR50 G2 Multi-Service Module	JD430A
HP MSR50 Main Processing Unit	JD653A
HP MSR50 Multi-Service Module	JD651A
HP MSR Advanced Network Data Encryption ESM Module	JD608A
HP MSR Standard Network Data Encryption ESM Module	JD609A
HP MSR Voice Co-processing Module	JD610A
HP MSR 32-Channel Voice Processing Module	JD598A
HP MSR 24-Channel Voice Processing Module	JD599A
HP MSR 16-Channel Voice Processing Module	JD600A
HP MSR 8-Channel Voice Processing Module	JD601A
HP MSR 9-port 10/100Base-T Switch DSIC Module	JD574B
HP MSR 9-port 10/100Base-T PoE Switch DSIC Module	JD621A
HP MSR 4-port 10/100Base-T Switch SIC Module	JD573B
HP MSR 4-port 10/100Base-T PoE Switch SIC Module	JD620A
HP MSR 1-port 10/100Base-T SIC Module	JD545B
HP MSR 1-port 100Base-X SIC Module	JF280A
HP MSR 1-port GbE Combo SIC Module	JD572A
HP MSR 2-port FXO SIC Module	JD558A
HP MSR 1-port FXO SIC Module	JD559A
HP MSR 2-port FXS SIC Module	JD560A
HP MSR 1-port FXS SIC Module	JD561A
HP MSR 2-port ISDN-S/T Voice SIC Module	JF821A
HP MSR 2-port FXS/1-port FXO SIC Module	JD632A
HP MSR 1-port E1 Voice SIC Module	JD575A
HP MSR 1-port T1 Voice SIC Module	JD576A
HP MSR 1-port E1/Fractional E1 (75ohm) SIC Module	JD634B
HP MSR 2-port E1/Fractional E1 (75ohm) SIC Module	JF842A
HP MSR 1-port T1/Fractional T1 SIC Module	JD538A
HP MSR 1-port ADSL over POTS SIC Module	JD537A
HP MSR 1-port ADSL over ISDN SIC Module	JG056B
HP MSR 1-port 8-wire G.SHDSL (RJ45) DSIC Module	JG191A
HP MSR 1-port Enhanced Sync/Async Serial SIC Module	JD557A
HP MSR 1-port ISDN-S/T SIC Module	JD571A
HP MSR 8-port Async Serial SIC Module	JF281A
HP MSR 16-port Async Serial SIC Module	JG186A
HP MSR 802.11b/g/n Wireless Access Point SIC Module	JF819A

Accessories

HP MSR 802.11b/g/n Wireless Access Point SIC Module (NA)	JG211A
HP 3G Wireless GSM/WCDMA WAN SIC Module	JF820A
HP MSR 4-port 10/100Base-T FIC Module	JF824A
HP MSR 2-port 10/100Base-T FIC Module	JD577A
HP MSR 1-port Gig-T FIC Module	JD583B
HP MSR 1-port 1000Base-X FIC Module	JD582A
HP MSR 2-port Gig-T FIC Module	JF269B
HP MSR 2-port 1000BASE-X FIC Module	JF270B
HP 24-port 10/100 DFIC A-MSR Module	JD603A
HP MSR 16-port 10/100Base-T / 1-port GbE Combo Switch FIC Module	JD604A
HP 24-port 10/100 PoE DFIC Module	JD617A
HP MSR 16-port 10/100Base-T PoE / 1-port GbE Combo Switch FIC Module	JD616A
HP MSR 8-port Enhanced Sync/Async Serial FIC Module	JD580A
HP MSR 4-port Enhanced Sync/Async Serial FIC Module	JD584A
HP MSR 8-port Enhanced Async Serial FIC Module	JF260B
HP MSR 16-port Enhanced Async Serial FIC Module	JF265B
HP MSR 4-port FXO FIC Module	JD593A
HP MSR 4-port FXS FIC Module	JD594A
HP MSR 4-port E/M FIC Module	JD602A
HP MSR 2-port E1 Voice FIC Module	JD587A
HP MSR 1-port E1 Voice FIC Module	JD607A
HP MSR 2-port T1 Voice FIC Module	JD606A
HP MSR 1-port T1 Voice FIC Module	JD605A
HP MSR 8-port E1/CE1/PRI (75ohm) FIC Module	JD585A
HP MSR 4-port E1/CE1/PRI FIC Module	JD588A
HP MSR 2-port E1/CE1/PRI FIC Module	JD578A
HP MSR 4-port E1/Fractional E1 FIC Module	JD591A
HP MSR 4-port T1/Fractional T1 FIC Module	JD592A
HP MSR 1-port E3/CE3/FE3 FIC Module	JD625A
HP MSR 1-port T3/CT3/FT3 FIC Module	JD629A
HP MSR 1-port E3 ATM FIC Module	JD596A
HP MSR 1-port T3 ATM FIC Module	JD595A
HP MSR 4-port E1 IMA (75ohm) FIC Module	JD622A
HP MSR 4-port Enhanced ISDN-S/T FIC Module	JD589A
HP MSR 1-port OC-3c/STM-1c ATM SFP FIC Module	JD633A
HP MSR 1-port OC-3c/STM-1c POS FIC Module	JD581C
HP MSR 1-port OC-3/STM-1 (E1/T1) CPOS FIC Module	JG201A
HP MSR 24-port FXS FIC Module	JG197A
HP MSR 8-port T1/CT1/PRI FIC Module	JD586B
HP MSR 8-port T1 IMA FIC Module	JG200A
HP MSR 8-port E1 IMA (75ohm) FIC Module	JF278B
HP MSR 1-port E1/CE1/PRI SIC Module	JF253B
HP MSR 4-port FXS / 1-port FXO DSIC Module	JG189A
HP MSR HSPA/WCDMA SIC Module	JG187A
NEW HP MSR Open Application Platform (OAP) with VMware vSphere FIC Module	JG533A

Accessories

Memory

HP Series 256MB DDR SDRAM	JD647A
HP Series 512MB DDR SDRAM	JD648A
HP 2GB DDR2 SDRAM Memory	JG205A
HP X600 1G Compact Flash Card	JC684A
HP X600 512M Compact Flash Card	JC685A
HP X600 256M Compact Flash Card	JC686A

Accessory Product Details

NOTE: Details are not available for all accessories. The following specifications were available at the time of publication.

<p>HP X120 1G SFP LC SX Transceiver (JD118B)</p> <p>A small form-factor pluggable (SFP) Gigabit SX transceiver that provides a full-duplex Gigabit solution up to 550m on a Multimode fiber.</p>	Ports	1 LC 1000BASE-SX port	
	Connectivity	Connector type LC	
	Physical characteristics	Wavelength	850 nm
		Dimensions	2.17(d) x 0.6(w) x 0.46(h) in. (5.51 x 1.52 x 1.17 cm)
		Full configuration weight	0.04 lb. (0.02 kg)
	Electrical characteristics	Power consumption typical	0.8 W
		Power consumption maximum	1.0 W
	Cabling	Maximum distance:	<ul style="list-style-type: none"> • FDDI Grade distance = 220m • OM1 = 275m • OM2 = 500m • OM3 = Not Specified by standard
		Cable length	up to 550m
		Fiber type	Multi Mode
Services	Refer to the HP website at www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.		

<p>HP X120 1G SFP LC LX Transceiver (JD119B)</p> <p>A small form-factor pluggable (SFP) Gigabit LX transceiver that provides a full duplex Gigabit solution up to 550m on MMF or 10Km on SMF</p>	Ports	1 SFP 1000BASE-LX port (IEEE 802.3z Type 1000BASE-LX)	
	Connectivity	Connector type LC	
	Physical characteristics	Wavelength	1300 nm
		Dimensions	2.17(d) x 0.6(w) x 0.46(h) in. (5.51 x 1.52 x 1.17 cm)
		Full configuration weight	0.04 lb. (0.02 kg)
	Electrical characteristics	Power consumption typical	0.8 W
		Power consumption maximum	1.0 W
	Cabling	Cable type:	Either single mode or multimode;
		Maximum distance:	<ul style="list-style-type: none"> • 550m for Multimode • 10km for Singlemode
		Fiber type	Both
Services	Refer to the HP website at www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.		

Accessory Product Details

HP X125 1G SFP LC LH40 1310nm Transceiver (JD061A)

A small form-factor pluggable SFP Gigabit LH40 transceiver that provides a full duplex Gigabit solution up to 40km on a single-mode fiber.

Ports	1 LC 1000Base-LH port (no IEEE standard exists for 1550 nm optics)
Connectivity	Connector type LC
	Wavelength 1310 nm
Physical characteristics	Dimensions 2.17(d) x 0.6(w) x 0.46(h) in. (5.51 x 1.52 x 1.17 cm)
	Full configuration weight 0.04 lb. (0.02 kg)
Electrical characteristics	Power consumption typical 0.8 W
	Power consumption maximum 1.0 W
Cabling	Cable type: Single-mode fiber optic, complying with ITU-T G.652;
	Maximum distance: <ul style="list-style-type: none">• 40km distance
Services	Fiber type Single Mode Refer to the HP website at www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.

HP X120 1G SFP LC LH40 1550nm Transceiver (JD062A)

A small form-factor pluggable (SFP) Gigabit LH40 transceiver that provides a full-duplex Gigabit solution up to 40 km on a single mode fiber.

Ports	1 LC 1000BASE-LH port (no IEEE standard exists for 1550 nm optics)
Connectivity	Connector type LC
	Wavelength 1550 nm
Physical characteristics	Dimensions 2.17(d) x 0.6(w) x 0.46(h) in. (5.51 x 1.52 x 1.17 cm)
	Full configuration weight 0.04 lb. (0.02 kg)
Electrical characteristics	Power consumption typical 0.8 W
	Power consumption maximum 1.0 W
Cabling	Cable type: Single-mode fiber optic, complying with ITU-T G.652;
	Maximum distance: <ul style="list-style-type: none">• 40km distance
Services	Fiber type Single Mode Refer to the HP website at www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.

Accessory Product Details

HP X125 1G SFP LC LH70 Transceiver (JD063B) A small form-factor pluggable (SFP) Gigabit LH70 transceiver that provides a full-duplex Gigabit solution up to 70km on a single-mode fiber.	Ports Connectivity	1 LC 1000BASE-LH port (no IEEE standard exists for 1550 nm optics) Connector type	LC
	Physical characteristics	Wavelength Dimensions	1550 nm 2.17(d) x 0.6(w) x 0.46(h) in. (5.51 x 1.52 x 1.17 cm)
	Electrical characteristics	Full configuration weight Power consumption typical	0.04 lb. (0.02 kg) 0.8 W
	Power consumption maximum	Power consumption maximum	1.0 W
Cabling	Cabling	Cable type: Single-mode fiber optic, complying with ITU-T G.652;	
		Maximum distance: • 70km	
	Services	Fiber type	Single Mode
		Refer to the HP website at www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.	

HP MSR 50 pin D-sub Male to 24 x RJ-11 Plug 15m Router Cable (JG318A)	Physical characteristics	Dimensions	14.6(d) x 13.3(w) x 4.5(h) in. (37.08 x 33.78 x 11.43 cm)
	Weight	Weight	4.61 lb. (2.09 kg)
Services	Refer to the HP website at: www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.		

HP MSR 8-port Async Serial SIC Module (JF281A)	Connectivity	Bit rate	115.2Kbps
	Interface	Interface	RS232
Services	Refer to the HP website at: www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.		

HP MSR 24-port FXS FIC Module (JG197A)	Connectivity	Interface	D50
	Physical characteristics	Dimensions	12(d) x 14.6(w) x 4.2(h) in. (30.48 x 37.08 x 10.67 cm)
		Weight	3.7 lb. (1.68 kg)
Services	Refer to the HP website at: www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.		

Accessory Product Details

HP MSR 8-port T1/CT1/PRI FIC Module (JD586B)	Physical characteristics	Dimensions	12(d) x 14.6(w) x 4.2(h) in. (30.48 x 37.08 x 10.67 cm)
		Weight	3 lb. (1.36 kg)
	Services	Refer to the HP website at: www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.	

HP MSR 8-port T1 IMA FIC Module (JG200A)	Connectivity	Interface	D68, ITU-G.703, ITU-G.704
	Physical characteristics	Dimensions	12(d) x 14.6(w) x 4.2(h) in. (30.48 x 37.08 x 10.67 cm)
		Weight	3.11 lb. (1.41 kg)
Services	Refer to the HP website at: www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.		

HP MSR 8-port E1 IMA (75ohm) FIC Module (JF278B)	Connectivity	T1: 2.048 Mbps	
		Interface	D68, ITU-G.703, ITU-G.704
	Physical characteristics	Dimensions	12(d) x 14.6(w) x 4.2(h) in. (30.48 x 37.08 x 10.67 cm)
		Weight	3.11 lb. (1.41 kg)
Services	Refer to the HP website at: www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.		

HP MSR 1-port E1/CE1/PRI SIC Module (JF253B)	Connectivity	E1: 2.048 Mbps	
		Interface	D15
	Physical characteristics	Dimensions	12.8(d) x 8.3(w) x 4.2(h) in. (32.51 x 21.08 x 10.67 cm)
		Weight	1.1 lb. (0.5 kg)
Notes	support 75ohm cable direct connection, can support 120ohm connection but need to JD511A (75-120 ohm convertor)		
Services	Refer to the HP website at: www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.		

Accessory Product Details

HP MSR 4-port FXS / 1-port FXO DSIC Module (JG189A)	Connectivity	Interface	5*RJ11
	Physical characteristics	Dimensions	12.8(d) x 8.3(w) x 4.2(h) in. (32.51 x 21.08 x 10.67 cm)
		Weight	1.19 lb. (0.54 kg)
	Services	Refer to the HP website at: www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.	

HP MSR HSPA/WCDMA SIC Module (JG187A)	Connectivity	Interface	2*TNC RF, 1*RJ45
	Physical characteristics	Dimensions	12.8(d) x 8.3(w) x 4.2(h) in. (32.51 x 21.08 x 10.67 cm)
		Weight	1.41 lb. (0.64 kg)
	Services	Refer to the HP website at: www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.	

HP 2GB DDR2 SDRAM Memory (JG205A)	Physical characteristics	Dimensions	8.8(d) x 5(w) x 2.6(h) in. (22.35 x 12.7 x 6.6 cm)
		Weight	0.99 lb. (0.45 kg)
	Services	Refer to the HP website at: www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.	

HP X600 1G Compact Flash Card (JC684A)	Physical characteristics	Dimensions	4.96(d) x 8.82(w) x 2.56(h) in. (12.6 x 22.4 x 6.5 cm)
		Weight	0.33 lb. (0.15 kg)
	Services	Refer to the HP website at: www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.	

HP X600 512M Compact Flash Card (JC685A)	Physical characteristics	Dimensions	4.96(d) x 8.82(w) x 2.56(h) in. (12.6 x 22.4 x 6.5 cm)
		Weight	0.33 lb. (0.15 kg)
	Services	Refer to the HP website at: www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.	

Accessory Product Details

HP X600 256M Compact Flash Card (JC686A)	Physical characteristics	Dimensions	4.96(d) x 8.82(w) x 2.56(h) in. (12.6 x 22.4 x 6.5 cm)
	Services	Weight	0.33 lb. (0.15 kg)
			Refer to the HP website at: www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.

To learn more, visit: www.hp.com/networking

© Copyright 2010-2014 Hewlett-Packard Development Company, L.P. The information contained herein is subject to change without notice. The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.