


Overview

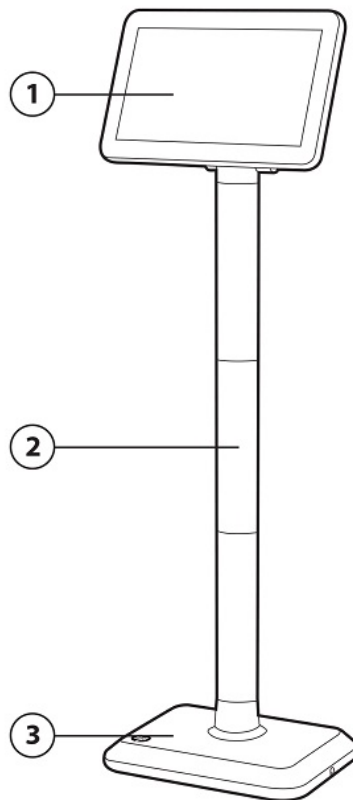

1. 7-inch diagonal LCD Display
2. Height-adjustable pole stand
3. Weighted base (can be permanently mounted)

Models

HP LCD Pole Display

F7A93AA

Introduction

Give customers a clear view of their transactions and share engaging, colorful, dynamic content at the point-of-sale with the HP LCD Pole Display.

Overview

Key Benefits

- 7-inch pole-mounted diagonal LCD display that integrates easily into your retail solution
 - Position as needed with adjustable height and swiveling of the display head
 - Place the durable, dust-resistant display in a range of high-traffic areas.
 - A USB connector powers the display and eliminates the need for additional cabling.
 - The edge-to-edge, bezel-less design is easy to clean, helps provide protection from dust, and creates a sleek, modern appearance.
-

Compatibility

The HP LCD Pole Display is compatible with the following systems and monitors.

- HP RP7 Retail System, Models 7100 and 7800
- HP RP5800 Retail System
- HP RP3 Retail System, Model 3100
- HP Retail Expansion Dock for ElitePad
- HP L6015tm and HP L6017tm Retail Touch Monitors

NOTE: Not all HP Retail system models are available in all regions.

Service and Support

Your HP Peripheral Limited Warranty is a three (3) year (HP Option Limited Warranty Period) parts replacement warranty. Additional HP Care Pack Services options are available to extend warranty coverage.

Technical Specifications

General	Display Type	LCD, backlit LED
	Resolution	1024x600 (fixed)
	Dot Pitch	0.05(W) × 0.15(H) mm
	Active area	153.6(W) × 90.0(H) mm
	Contrast ratio	700:1 (max)
	Brightness	250 cd/m ²
	Response rate	Response rate 30ms (rise+fall time)
	Viewing Angle (of LCD Panel)	Left: 75°, Right: 75°, Top: 70°, Bottom: 75°
	Color Gamut	70% (CIE 1931 Standard NTSC)
Mechanical	CFD Dimensions (WxDxH)	185 x 66 x 158 mm
	CFD Weight	0.71 kg
	Pole Pieces/Stand Weight	1.80 kg
	Pole Pieces/Stand	3 pieces
	Dimensions	Pole Sections (each): 130 mm; Base: 180 x 140 x 24 mm
	Adjustability	Tilt Range of Motion - 293°
	Color	HP Black
Interface/Connection	Interface	USB
Power	Operating Voltage	5V
	Full Load Current	2.5W(DC +5V , 500mA)
	Idle Current	0.64W (DC+5V , 128mA)
Temperature Range	Operating	50° to 104° F (10 to 40° C) at 20% to 85% humidity (non-condensing at ambient)
	Non-operating	-22° to 149° F (-30° to 65° C) at 5% to 90% humidity (non-condensing at ambient)
Drivers	Windows	
Operating System Compatibility	Windows	<ul style="list-style-type: none">• Windows 8/8.1 Professional 32bit & 64bit• Windows Industry 8/8.1 32 and 64 bit• Windows 7 Professional 32 and 64-bit• Windows Embedded POSReady 7 32 and 64-bit• Windows Embedded POSReady 2009• Windows XP Professional
	Option Kit Contents	HP LCD Pole Display , Pole Stand, Pole Pieces (qty 3.), Assembly Screws, HP Point of Sale System Software and Documentation CD

© Copyright 2014 Hewlett-Packard Development Company, L.P. The information contained herein is subject to change without notice. The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein. Microsoft, Windows, Windows XP and Windows Vista are trademarks of the Microsoft group of companies.

